

DUM 6 DUF 6

Servomotors

Rated continuous torques
from 0.4 Nm to 63 Nm

Operating Manual



WITTUR Electric
Drives GmbH



These operating instructions are applicable to servomotors

DUM 6-..... DUF 6-.....

Edition: 02 June 2020 V21

WITTUR Electric Drives GmbH reserves the right to correct or change the contents of this information and product details without prior notice. No liability can be accepted for damage, injuries or outlay arising therefrom. We cannot warrant the correctness and completeness of the details.



WITTUR Electric
Drives GmbH



Offenburger Str. 3
D-01189 Dresden
Germany
Tel. +49(0)3 51-40 44-0
Fax +49(0)3 51-40 44-1 11
info.wed@wittur.com
www.wittur-edrives.de

Contents

| | |
|--|-----------|
| Safety instructions | 4 |
| EC Declaration of Conformity | 5 |
| Overview | 6 |
| Basic features | 7 |
| Speed-torque characteristic | 8 |
| Standards, codes and regulations | 8 |
| Construction, definitions | 9 |
| Drive end | 9 |
| Direction of rotation | 9 |
| Nameplate | 9 |
| Symbols | 9 |
| Installation and operation | 10 |
| Degree of protection | 10 |
| Cooling, altitude, ambient conditions | 10 |
| Shaft ends | 11 |
| Holding brake | 11 |
| Winding, insulation system | 12 |
| Separately driven fan | 12 |
| Conductor size | 12 |
| Speed and shaft position measuring system / resolver | 12 |
| Monitoring the winding temperature | 13 |
| Transport and packaging | 14 |
| Storage | 15 |
| Maintenance | 15 |
| Safety instructions | 15 |
| Maintenance intervals | 15 |
| Permissible axial and radial forces | 16 |
| Axial forces | 16 |
| Radial forces | 17 |
| Connection system DUM/F 6-A...D | 18 |
| Accessories | 18 |
| Connection system DUM/F 6-E | 19 |
| Accessories | 19 |
| Type code | 20 |
| Technical data DUM 6-A... | 22 |
| Technical data DUM 6-C... | 24 |
| Technical data DUM 6-D... | 26 |
| Technical data DUM 6-E... | 28 |
| Technical data DUF 6-C... | 30 |
| Technical data DUF 6-D... | 32 |
| Technical data DUF 6-E... | 34 |

Safety instructions

The motors of the series DUM/F 6 are designed for use in commercial plants. They comply with the harmonised standards of the series VDE 0530/EN 60034. They are not to be operated in hazardous areas unless expressly permitted (note additional reference).

The local conditions on site shall comply with the nameplate data. During operation (even at zero speed), the motors possess dangerous live and moving parts and may have hot surfaces. Only qualified and competent specialist personnel are allowed to handle, connect, commission and maintain the motors. (Observe VDE 0105; IEC 364). Improper conduct may result in serious injury to persons and property.

In this manual, the following pictograms are used to mark warnings and important notes.



means that death or serious injury to persons or property will occur unless the appropriate precautions are taken.



means that death or serious injury to persons or property may occur unless the appropriate precautions are taken.



means that slight injury or damage to persons or property may occur unless the appropriate precautions are taken.

Only qualified personnel are allowed to perform any planning, installation or maintenance work.

The personnel must be trained for the job and must be familiar with the installation, assembly, commissioning and operation of the product.

The instructions given in this manual or any other instructions supplied must always be observed.



- Remove power to the machine before starting any work on the motors.
- Check the proper functioning of the brake (if provided) after installing the motor.
- Repairs may only be carried out by the manufacturer or an authorised repair agency. Unauthorised opening and tampering may lead to bodily injury and property damage and may entail the loss of warranty rights.
- Before commissioning motors with a shaft key, secure the key to ensure that it cannot be thrown out if this is not already prevented by driving elements such as a belt pulley, coupling, etc.



- The motors are not designed for direct connection to the three-phase system but are to be operated via an electronic power converter. Direct connection to the system may destroy the motor.
- Surface temperatures of more than 100°C may occur on the motors. Therefore, no temperature-sensitive parts must be allowed to come into contact or be attached to them. Protection against accidental contact should be provided, if required.
- The optional holding brake is only designed for a limited number of emergency brakings. Never use it as a working brake.
- On motors with plug connector and built-in brake, it is the user's responsibility to install the varistor provided to control the brake.
- Connect the winding temperature sensor and evaluate its signal by means of a suitable circuitry. The temperature sensor protects the motor from thermal overload if the temperature change is slow. It does not, however, provide an allround protection. Therefore, additional measures such as monitoring I^2t by the converter electronic system are required to protect the motor from fastarising thermal overload.
- Dangerous voltages are applied at the terminals of synchronous motors when the rotor is turning.



EU-Konformitätserklärung EU Declaration of Conformity

im Sinne der EU-Richtlinie Niederspannung (2014/35/EU)
as defined by the EU Low Voltage Directive (2014/35/EU)

Der Hersteller
The manufacturer

WITTUR Electric Drives GmbH
Offenburger Straße 3
D-01189 Dresden
Deutschland / Germany

erklärt hiermit, dass die folgenden Produkte
certifies that the following products

Produktbezeichnung:
Product designation:

| | |
|----------------------------|--|
| Asynchronmotoren | DS□ 1, DS□ 3 |
| <i>Asynchronous motors</i> | |
| Synchronmotoren | DS□ 2, DS□ 4, DG□ 4, DU□ 4, DG□ 6, DU□ 6, G□ 8, R□ 8, WGG, WS□ |
| <i>Synchronous motors</i> | |
| Sondermotoren | 4HX, 6PX, QPX |
| <i>Custom-made motors</i> | |

den Bestimmungen der EU-Richtlinie 2014/35/EU entsprechen.
are in conformity with the specification of the EU Directive 2014/35/EU.

Erklärung zur EMV-Richtlinie (2014/30/EU)

Bei Netzbetrieb an sinusförmiger Wechselspannung erfüllen die Motoren die Anforderungen der EU-Richtlinie „Elektromagnetische Verträglichkeit“ 2014/30/EU unter Berücksichtigung der Normen EN 61000-6-1...4.

Statement relating to EMC Directive (2014/30/EU)

When connected to a sinus-shaped a.c. voltage system, the motors conform to the requirements of the EC Directive "Electromagnetic compatibility" 2014/30/EU, including those specified in standards EN 61000-6-1...4.

Folgende Normen sind angewandt:
The following standards are in use:

EN / IEC 60 204-1: Sicherheit von Maschinen; Elektrische Ausrüstung von Maschinen;

Teil 1: Allg. Anforderungen

Safety of machinery - Electrical equipment of machines. Part 1: General requirements

EN / IEC 60 034: Drehende elektrische Maschinen

Rotating electrical machines


EN ISO 12 100: Sicherheit von Maschinen - Allgemeine Gestaltungsleitsätze,

Risikobeurteilung und Risikominimierung

Safety of machinery - General principles for design, risk assessment and risk reduction

Dresden, 2016-10-27

(Ort, Datum)
(Place, date)



Markus Weber
Geschäftsführer
Managing Director



Steffen Mann
Leiter Entwicklung/Konstruktion
Head of Development/Construction

Overview


| Motor type | Stall torque 10 min ⁻¹ | Rated torque at | | | | | |
|------------------|--------------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | 1.000 min ⁻¹ | 1.500 min ⁻¹ | 2.000 min ⁻¹ | 3.000 min ⁻¹ | 4.000 min ⁻¹ | 6.000 min ⁻¹ |
| | | M _{d10} [Nm] | M _{dN} [Nm] | M _{dN} [Nm] | M _{dN} [Nm] | M _{dN} [Nm] | M _{dN} [Nm] |
| self-cooling | DUM 6-A1 | 0,48 | | | | | 0,43 |
| | DUM 6-A2 | 0,68 | | | | | 0,62 |
| | DUM 6-A3 | 0,89 | | | | | 0,80 |
| | DUM 6-A4 | 1,17 | | | | | 1,05 |
| | DUM 6-C1 | 4,0 | | 3,8 | 3,5 | 3,1 | |
| | DUM 6-C2 | 5,8 | | 5,5 | 4,8 | 4,2 | |
| | DUM 6-C3 | 7,2 | | 6,9 | 6,4 | 5,7 | |
| | DUM 6-C4 | 8,6 | | 8,3 | 7,6 | 6,8 | |
| | DUM 6-D1 | 8,3 | 8,0 | 7,6 | 6,8 | | |
| | DUM 6-D2 | 11,8 | 11,5 | 11,0 | 9,5 | | |
| | DUM 6-D3 | 15,6 | 15,0 | 14,0 | 11,9 | | |
| | DUM 6-D4 | 18,8 | 18,0 | 16,9 | 13,7 | | |
| enforced-cooling | DUM 6-E1 | 23,7 | 23,0 | 19,0 | 14,0 | | |
| | DUM 6-E2 | 35,5 | 34,4 | 28,0 | 19,0 | | |
| | DUM 6-E3 | 48,5 | 47,0 | 40,0 | 27,0 | | |
| | DUF 6-C1 | 5,2 | | 5,2 | 4,7 | 4,2 | |
| | DUF 6-C2 | 7,7 | | 7,4 | 6,4 | 5,6 | |
| | DUF 6-C3 | 9,5 | | 9,3 | 8,6 | 7,7 | |
| | DUF 6-C4 | 11,4 | | 11,2 | 10,3 | 9,2 | |
| | DUF 6-D1 | 11,0 | 10,8 | 10,3 | 9,1 | | |
| | DUF 6-D2 | 15,6 | 15,6 | 14,9 | 12,8 | | |
| | DUF 6-D3 | 20,6 | 20,2 | 18,9 | 16,1 | | |
| | DUF 6-D4 | 24,8 | 24,3 | 22,8 | 18,5 | | |
| | DUF 6-E1 | 30,8 | 30 | 28 | 24 | | |
| | DUF 6-E2 | 45,8 | 45 | 40 | 34 | | |
| | DUF 6-E3 | 63 | 62 | 57 | 48 | | |

Basic features

| | Standard | Options |
|-----------------------------|--|---|
| Construction type | IM B5 (IM V1, IM V3) | |
| Degree of protection | IP 65 | |
| Shaft exit | IP 64 | IP 65 |
| Motor type | permanent-field synchronous servomotor | |
| Magnet material | neodymium-iron-boron | |
| Rated data | for duty S1 (continuous operation) | |
| Vibrational severity | B | |
| Flange accuracy | N | R |
| Thermal class | 155 (F); wire insulation class 180 (H) | |
| Winding protection | thermistor (PTC) 150°C (with reinforced insulation to EN 50178) | KTY 84; KTY 83; miniature thermal-delay switch |
| Connection to system | connector (rotatable, speedTEC - compatible) | |
| Measuring system connection | connector (rotatable, speedTEC - compatible) | |
| Measuring system | resolver | absolute sine-cosine encoder |
| Cooling | self-cooling | enforced cooling |
| Brake | - | permanent-field holdig brake |
| Paint finish | RAL 9005 (dull black) | special paints |
| Bearings | radial deep-groove ball bearing, life-lubricated (locating bearing at D-end) | |
| Shaft end | plain shaft end | key (to DIN 6885) balanced with half-key |
| Ambient temperature range | from -15°C to +40°C | |
| Max. rel. humidity | 90 % at 20°C (no moisture condensation) | |
| UL-file number | E 234 973 | |

Speed-torque characteristic

Definitions

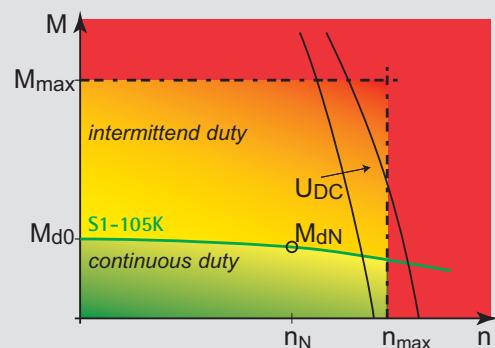

| | | |
|------------|-------------------|--|
| M_{d0} | Stall torque | Thermal limiting torque of the motor at standstill ($n=0 \text{ min}^{-1}$). This torque can be delivered for any length of time (S1). |
| M_{d10} | Stall torque | Thermal limiting torque of the motor at $n > 10 \text{ min}^{-1}$. This torque can be delivered for any length of time (S1). |
| M_{\max} | Max. torque | Maximum permissible torque which the motor can deliver for short periods. |
| M_{dN} | Rated torque | Thermal limiting torque of the motor at rated speed with duty S1 |
| I_{dN} | Rated current | Rated current of the motor (at n_N and M_{dN}) |
| n_N | Rated speed | Rated motor speed |
| n_{\max} | Max. speed | Maximum permissible motor speed |
| U_{DC} | D.c. link voltage | The d.c. link voltage determines the maximum available output voltage of the converter and thus the motor speed which can be achieved. |

Standards, codes and regulations

The servomotors of the DUM/F 6 series are designed in accordance with IEC recommendations and the applicable VDE and DIN standards (see table opposite).

The motors are manufactured in accordance with the international quality standard ISO 9001.

| Title | DIN/VDE | EN | IEC |
|---|----------------------|--------------|---------------|
| Rotating electrical machines; rating and performance | DIN VDE 0530 Part 1 | EN 60 034-1 | IEC 600 34-1 |
| Terminal markings and direction of rotation | DIN VDE 0530 Part 8 | EN 60 034-8 | IEC 600 34-8 |
| Classification of types of construction and mounting arrangements | DIN VDE 0530 Part 7 | EN 60 034-7 | IEC 600 34-7 |
| Methods of cooling | DIN VDE 0530 Part 6 | EN 60 034-6 | IEC 600 34-6 |
| Classification of degrees of protection by enclosures | DIN VDE 0530 Part 5 | EN 60 034-5 | IEC 600 34-5 |
| Mechanical vibration of certain machines – Measurement, evaluation and limits of vibration severity | DIN VDE 0530 Part 14 | EN 60 034-14 | IEC 600 34-14 |
| Noise limits | DIN VDE 0530 Part 9 | EN 60 034-9 | IEC 600 34-9 |
| Cylindrical shaft ends for rotating electrical machinery | DIN 748 Part 3 | | IEC 600 72 |

Construction, definitions


The servomotors of the DUM/F6 series are 6- or 8-pole permanent-field synchronous motors with a sine-wave induced voltage. A new compact coil technique ensures a high power density of the motors.

Drive end

In DIN EN 60034-7, the two ends of a motor are defined as follows:

DE: Drive end of the motor



NDE: Non-drive end of the motor

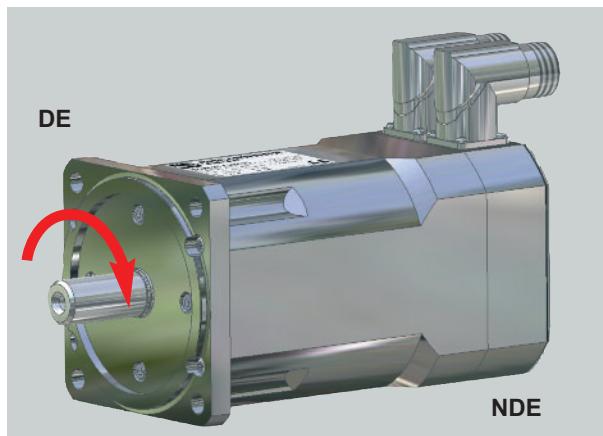

Direction of rotation

When the motor terminals U1, V1, W1 are connected to a supply voltage L1, L2, L3 (with this same phase order) the motor rotates clockwise when viewed facing the D-end.

Nameplate

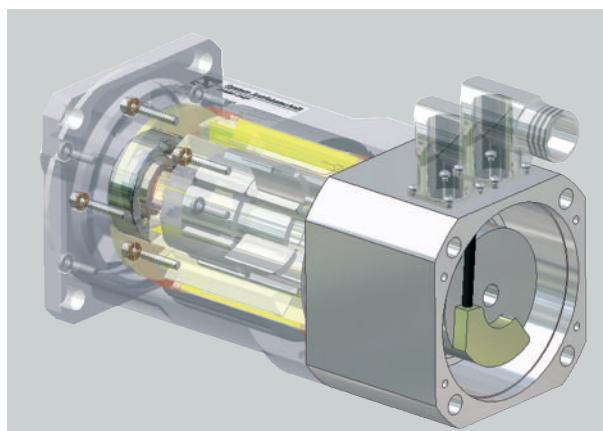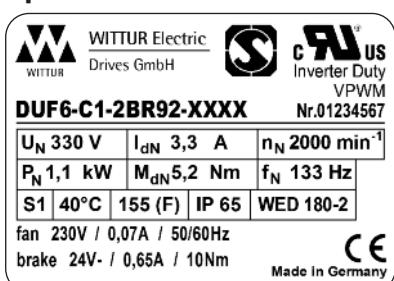

Symbols

| | | | |
|-----------|---|-----------|---|
| M_{d0} | Stall torque (at $n=0 \text{ min}^{-1}$) | I_{d0} | Current at stall torque (at $n=0 \text{ min}^{-1}$) |
| M_{d10} | Stall torque (at $n>10 \text{ min}^{-1}$) | I_{d10} | Current at stall torque (at $n>10 \text{ min}^{-1}$) |
| M_{dN} | Rated torque | I_{dN} | Rated current |
| P_{dN} | Rated power | n_N | Rated speed |
| R_{u-v} | Phase-to-phase winding resistance (at 20°C) | L_{u-v} | Phase-to-phase winding inductance |
| p | Number of pole pairs | k_e | Voltage constant |
| M_{max} | Max. permissible torque | I_{max} | Max. permissible current |
| n_{max} | Max. permissible speed | J_L | Rotor inertia |
| m | Motor weight | f_N | Rated frequency |
| F_A | Axial force | F_Q | Radial force |
| R_S | Phase resistance (at 20°C) | L_S | Phase inductance |

Installation and operation

Degree of protection

The motors of the DUM/F 6 series are generally designed to meet degree of protection IP65 as specified in DIN EN 60034-5. See table below for the respective sealing.

| Shaft sealing | Degree of protection | User information |
|----------------------------|----------------------|---|
| Diaphragm seal (standard) | IP 64 | <p>Exposure to moisture in the shaft and flange area must be kept to a minimum.</p> <p> Please contact us, if the motor is mounted with the "shaft end upward" (IM V3, IM V19, IM V36). Shaft outlet is not dustproof.</p> |
| Rotary shaft seal (option) | IP 65 | Suitable for the installation of non-sealed gear units to seal against oil. |

Lubrication of the rotary shaft seal



When using a rotary shaft seal, note that the sealing lip needs to be sufficiently lubricated and cooled with a high-quality mineral oil such as SAE 20 to ensure the proper functioning of the seal. Sufficient lubricant supply is required for proper heat dissipation.

If the shaft seal is greased, the maximum permissible motor speed may need to be reduced.

Regular regreasing is imperative!

Excessive peripheral speeds destroy the sealing lip and its protective function is no longer guaranteed.

Cooling, altitude, ambient conditions

The rated power (rated torque) applies to continuous operation (duty type S1) at a coolant temperature of 40°C and an altitude of up to 1,000 m a.s.l. It is determined by using defined aluminium test flanges.

If the motor flange is thermally insulated, it is not able to dissipate the motor heat. This requires a reduction of the rated motor torque.

| Motor type | Test flange dimensions |
|------------|------------------------|
| DUM 6-A | 200 x 100 x 10 |
| DUM/F 6-C | 232 x 300 x 19 |
| DUM/F 6-D | 370 x 370 x 19 |
| DUM/F 6-E | 410 x 396 x 23 |

At higher temperatures or altitudes, the overload capability of the motors is reduced (see table opposite).

| A.s.l. [m] | Coolant temperature [°C] | | | | | |
|---------------|--------------------------|-------|------|------|------|------|
| | <30 | 30-40 | 45 | 50 | 55 | 60 |
| 1000 | 1.07 | 1.00 | 0.96 | 0.92 | 0.87 | 0.82 |
| 1500 | 1.04 | 0.97 | 0.93 | 0.89 | 0.84 | 0.79 |
| 2000 | 1.00 | 0.94 | 0.90 | 0.86 | 0.82 | 0.77 |
| 2500 | 0.96 | 0.90 | 0.86 | 0.83 | 0.78 | 0.74 |
| 3000 | 0.92 | 0.86 | 0.82 | 0.79 | 0.75 | 0.70 |
| 3500 | 0.88 | 0.82 | 0.79 | 0.75 | 0.71 | 0.67 |
| 4000 | 0.82 | 0.77 | 0.74 | 0.71 | 0.67 | 0.63 |



Surface temperatures of more than 100°C may occur on the motors. Therefore, no temperature-sensitive parts must be allowed to come into contact or be attached to them.

If the motor is equipped with a separately driven fan, connect the fan properly and check the direction of rotation (arrow on the fan housing). Make sure that the rotation of the fan wheel is not obstructed.


The different cycle frequencies of the electronic converter output stages may require the motor to be derated, resulting from an increased harmonic content.

Shaft ends

Motors of the DUM/F 6 series have cylindrical shaft ends to DIN 748. As an option, the shaft end is also available with a keyway to DIN 6885, Part 1.

Use suitable devices for mounting and pulling off driving elements such as gears, pulleys, couplings, etc. Support the device at the DE shaft end.

Do not expose the motor to any impacts or blows.

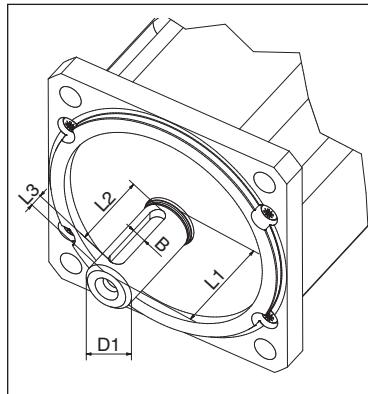

| Motor type | Shaft end | | Keyway | | |
|------------|-----------|----|--------|----|----|
| | D1 | L1 | B | L2 | L3 |
| DUM 6-A | Ø 9 k6 | 20 | 3 | 12 | 4 |
| DUM/F 6-C | Ø 19 k6 | 40 | 6 | 32 | 4 |
| DUM/F 6-D | Ø 24 k6 | 50 | 8 | 40 | 5 |
| DUM/F 6-E | Ø 32 k6 | 58 | 10 | 50 | 5 |

Holding brake

The optional built-in holding brake is used to fix the motor shaft when the motor is at rest or de-energised. It is a permanent-field single-disc brake which operates on the closed-circuit principle, i.e. the brake is effective when the motor is de-energised, thus braking the motor shaft.



The holding brake is not a working brake.

Holding brakes are operated on d.c. current. The nominal voltage is 24 V. They can be connected to a central d.c. voltage supply. Overvoltages, even transient, are not permitted since they deteriorate the permanent magnets irreversibly. The excitation current ripple must be less than 20% to ensure reliable opening of the brake and prevent disturbing humming noises.


Since the holding brakes are permanent-magnet brakes, be sure to observe the correct polarity of the d.c. voltage, otherwise the brake will not open.



Modern (field-oriented) frequency converters are able to produce a high torque even at low motor speeds. If the converter has a sufficient current reserve, a multiple of the rated motor torque can be produced. In this case the motor shaft may turn even if the holding brake is applied, because the holding torque of the brake is exceeded.

Suppressor circuit

If the excitation current of the holding brake is switched off on the d.c. side, a voltage peak occurs which can be higher than 1,000 V. It is caused by the inductance of the holding brake. A varistor R should be connected in parallel to the coil to prevent this voltage peak. Recommended type: Q69-X3022 (S 14 K 30).

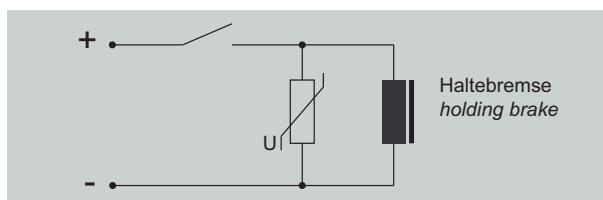

Winding, insulation system

The insulation materials we use ensure insulation class 155(F) to DIN EN 60034. Therefore, the winding temperature rise may be max. 105 K at a coolant temperature of +40°C. We also use insulation materials with the temperature profile TI 200 of class 180(H) to increase the reliability of the motors.

The insulation system of the motors is designed such that they can be connected to a converter with a maximum d.c. link voltage $U_{\text{link max.}}$ up to max. 700 Volt.

Note: $U_{\text{link max.}}$ is the maximum value of the d.c. link voltage which is only transient and approximately equivalent to the inception voltage of the braking chopper or of the energy recovery unit.

The maximum permissible rate of voltage rise (dU/dt) at the motor terminals may be max. 4 kV/ μ s. The overvoltage at the motor terminals must not exceed 1.56 kV. It may be necessary to use motor current filters or reactors to achieve these values.



The motors are not designed for direct connection to the three-phase system but have to be operated via an electronic converter. Direct connection to the system may destroy the motor.

Separately driven fan

The motors DUF are forced-air-cooled by an axial fan. The connection data are given on the motor nameplate. The necessary terminal plug is included in the delivery of the motor.

| Motor type | Rated voltage | Rated torque | Degree of protection |
|-------------------|----------------------------|--------------|----------------------|
| DUF 6-C... | 230V (+6%/-10%) 50/60 Hz | 0.07 A | IP 54 |
| DUF 6-D... | 230V (+6%/-10%) 50/60 Hz | 0.12 A | IP 54 |
| DUF 6-E... | 3x400V (+6%/-10%) 50/60 Hz | 0,15 A | IP 44 |

Conductor size

The recommended values for the dimensioning of the conductor cross-sections are given in the table. They are specified in DIN VDE 0113 (EN 60 204) "Electrical equipment of industrial machines" for the current carrying capacity of PVC-insulated cables with copper conductor routed in cable ducts. The maximum permissible ambient temperature is +40 °C.


| Conductor size [mm ²] | perm. maximum current [A] |
|-----------------------------------|---------------------------|
| 0.75 | 7.8 |
| 1.0 | 9.6 |
| 1.5 | 14.4 |
| 2.5 | 18.3 |
| 4.0 | 25.0 |
| 6.0 | 32.0 |
| 10.0 | 43.0 |
| 16.0 | 58.0 |

Speed and shaft position measuring system/resolver

The DUM 6 motors are equipped with 2-pole resolvers, size 15, for speed and shaft position control..

Technical data

| | |
|-------------------------|--------------|
| Number of poles | 2 |
| Transformation ratio | 0.5 ±5% |
| Input voltage/frequency | 7 V / 10 kHz |
| Input current | 65 mA max. |
| Electrical error | ±10' max. |
| Phase displacement | 0° nom. |

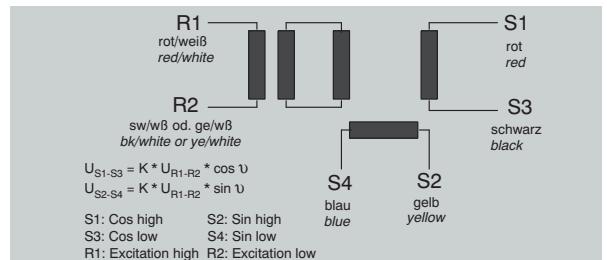

The measuring system of synchronous motors (DUM 6) must be adjusted to the respective converter. Any misadjustment may lead to uncontrolled motor response or complete failure of the motor.

Note: 2-pole resolvers are installed as standard. Other resolver pole numbers or other measuring systems are available (e.g. absolute sine-cosine encoders).


Monitoring the winding temperature

PTC thermistors are installed as standard in the DE winding head to protect the winding from thermal overload when the temperature change is slow (temperature change in minutes or hours).

The maximum operating voltage of the PTC thermistors must not exceed 30V-.

Due to the non-ideal thermal coupling, the temperature sensor follows rapid winding temperature changes only with delay, thus being unable to protect the winding if the thermal overload of the motor is transient and high. Therefore, additional protection is required (such as monitoring I^2xt by the converter electronic system) to protect the motor from fast-rising thermal overload.

The evaluation of the temperature sensor belongs to the monitoring of the motor winding. The temperature sensor follows rapid temperature changes only with delay. Especially the windings of small motors (DUM 6-Ax) are very sensitive to overload.

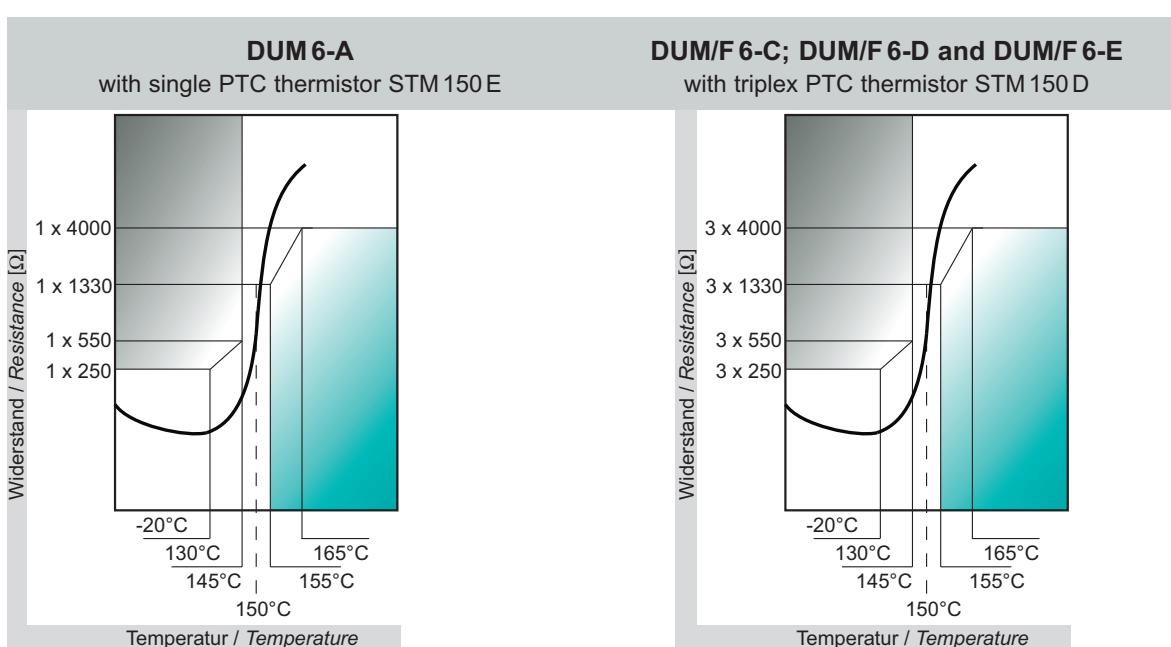



Note: The built-in PTC thermistor is the basic version. Other temperature detectors such as KTY 84 or miniature thermal time-delay switches are available as an option.

The maximum motor current must be limited to ensure that the temperature sensor trips quickly enough. (See the following diagrams to adjust the recommended current limits.) If a higher current limit needs to be adjusted, the current must not exceed the current-time values shown in the characteristics and the motor max. current I_{max} .



The characteristics apply in case of a failure. They must not be applied for normal motor operation.
 The r.m.s. value of the motor current is not permitted to exceed the nominal continuous current I_{dN} within any cycle!

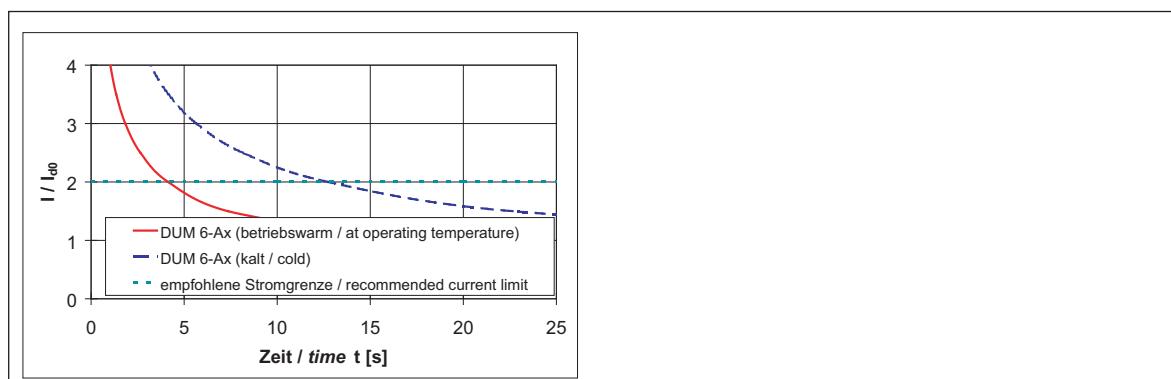

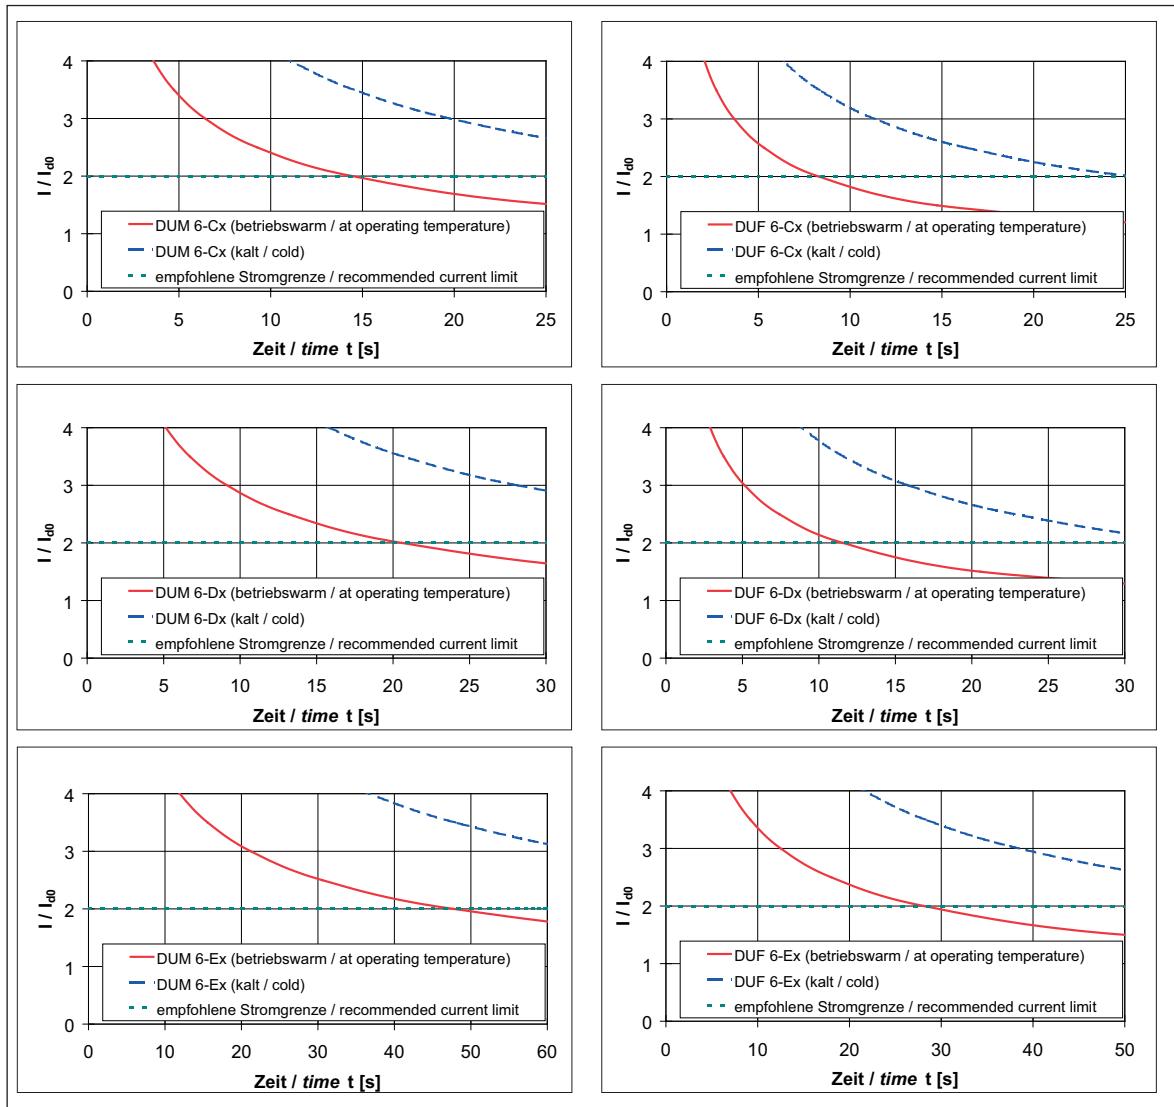

Transport and packaging

The packaging and transport technologies are dependent on the shipping conditions. The following types of packaging are provided:

- Folding boxes
- Covered and steel-strapped flat pallets (transport by lorry)
- Special pallets
- Special packaging in wooden cases

The motors should always be shipped so that no damage can occur in transit.



Avoid any impacts, sharp sudden movements and strong vibrations during transport. Operate the crane only at creeping speed to lift or place down the motors. This prevents damage to the bearings or the machine.

The motors leave the factory in a faultless condition after being tested.

Make a visual check for any external damage immediately upon their arrival on site. If any damage caused in transit is found, make a notice of claim in the presence of the forwarder. In addition, report the damage to the manufacturer at the latest within one week. Do not put these motors into operation.

Storage

If the motors are not installed immediately after their arrival, they should be properly stored.

Store the motors only in closed, dry, dust-free, well-ventilated and vibration-free rooms. Damp rooms are unsuitable for storage! Do not remove the anti-corrosive coat from the shaft ends, flange surfaces, etc. Check it at certain intervals depending on the ambient conditions, and touch up, if required.

Take care that no vibrations occur in storage to prevent the anti-friction bearings from being damaged. It is advisable to turn the rotor several times at certain intervals to prevent corrosion of the bearings.

After prolonged storage (>3 months), rotate the motor in both directions at a low speed ($\leq 100 \text{ min}^{-1}$) to allow the grease to distribute evenly in the bearings.

Maintenance



Repairs may only be carried out by the manufacturer or an authorised repair agency. Unauthorised opening and tampering may lead to injuries to persons and property and may lead to a loss of warranty rights.

Safety instructions

Before starting any work on the motors, and particularly before opening any covers of active parts, make sure that the motor and plant have been properly isolated.

This refers also to any additional or auxiliary circuits.

The "5 safety rules" to be applied according to DIN VDE 0105 are:

- Disconnect the motor.
- Lock it against unintentional restarting.
- Verify the safe isolation from supply.
- Earth and short (with voltages above 1,000V).
- Safeguard or cover adjacent live parts.

Maintenance intervals


Careful and regular maintenance and inspections are required to recognise and remedy troubles in good time, before they lead to major damage.

Since the operating conditions of the motors differ considerably, only general maintenance intervals to ensure trouble-free operation can be specified. They need to be adapted to the local conditions such as the actual level of contamination, number of starts, load, etc.

- Clean the motor, depending on the local level of contamination.
- Retighten the electrical and mechanical connections. Check for deterioration of running smoothness or bearing noise: after approx. 500 operating hours, but after 1 year at the latest.
- With rotary shaft seal option only: Regrease the rotary shaft seal depending on the operating mode every 50 to 500 operating hours (applies only to grease lubrication!).

Permissible axial and radial forces

The maximum permissible axial and radial forces must not be exceeded in order to ensure smooth running of the motor.




Axial forces

The following forces $F_{A\text{permiss.}}$ are permitted in axial direction with the radial force F_Q acting simultaneously


| Motortyp | Axial forces $F_{A\text{permiss.}} [\text{N}]$ at speeds $n [\text{min}^{-1}]$ (with $F_Q \neq 0$) | | | | | | | |
|------------|---|-------|-------|-------|-------|-------|-------|-------|
| | 1,000 | 1,500 | 2,000 | 3,000 | 4,000 | 4,500 | 6,000 | 9,000 |
| DUM 6-A1 | | | | | | | | |
| DUM 6-A2 | | | 130 | 105 | 95 | | 80 | 70 |
| DUM 6-A3 | | | | | | | | |
| DUM 6-A4 | | | | | | | | |
| DUM/F 6-C1 | | | 310 | 260 | 230 | | 200 | |
| DUM/F 6-C2 | | | | | | | | |
| DUM/F 6-C3 | | | | | | | | |
| DUM/F 6-C4 | | | | | | | | |
| DUM/F 6-D1 | | | 330 | 280 | 240 | | | |
| DUM/F 6-D2 | | | | | | | | |
| DUM/F 6-D3 | | | | | | | | |
| DUM/F 6-D4 | | | | | | | | |
| DUM/F 6-E1 | 890 | 780 | 700 | 590 | 520 | | | |
| DUM/F 6-E2 | | | | | | | | |
| DUM/F 6-E3 | | | | | | | | |

$$F_{A\text{ges.}} = F_A + F_W$$

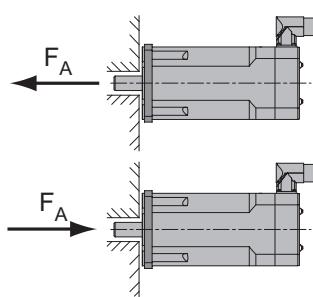


$$F_{A\text{ges.}} = F_A$$

$$F_{A\text{ges.}} = F_A - F_G + F_W$$

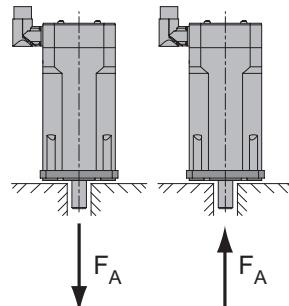

$$F_{A\text{ges.}} = F_A + F_W$$

$$F_{A\text{ges.}} = F_A + F_G$$

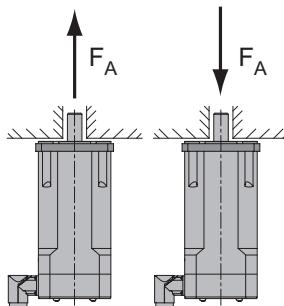

$$F_{A\text{ges.}} = F_A - F_G$$

Constructin type

B5

V1

V3


Depending on the mounting arrangement of the motors and the direction of the effective axial force F_A , the rotor inertial force F_G and the force of the ondular washer F_W must be taken into consideration. The total effective axial force $F_{A\text{ges.}}$ is calculated as shown in the above figure.

| Motor type | $F_W [\text{N}]$ | $F_G [\text{N}]$ |
|------------|------------------|------------------|
| DUM 6-A1 | 2 | |
| DUM 6-A2 | 3 | |
| DUM 6-A3 | 90 | 4 |
| DUM 6-A4 | 5 | |
| DUM/F 6-C1 | | 13 |
| DUM/F 6-C2 | | 17 |
| DUM/F 6-C3 | 110 | 20 |
| DUM/F 6-C4 | | 24 |
| DUM/F 6-D1 | | 25 |
| DUM/F 6-D2 | | 31 |
| DUM/F 6-D3 | 150 | 37 |
| DUM/F 6-D4 | | 43 |
| DUM/F 6-E1 | | 65 |
| DUM/F 6-E2 | 435 | 80 |
| DUM/F 6-E3 | | 95 |


Radial forces

The endurance strength of the shaft and the bearing life are decisive for the permissible radial load. Taking the endurance strength into consideration, F_Q is not permitted to be exceeded even during dynamic processes (acceleration, braking).


DUM 6-A

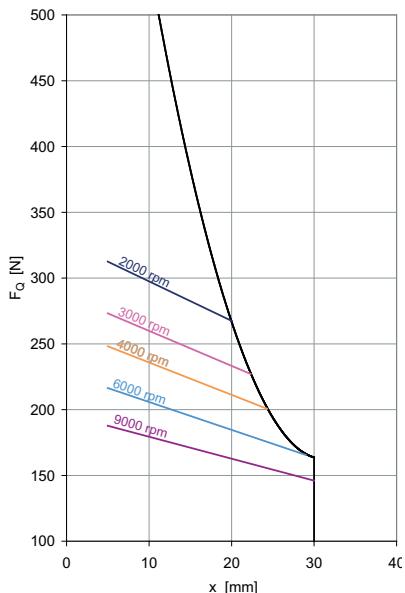


DUM/F 6-C

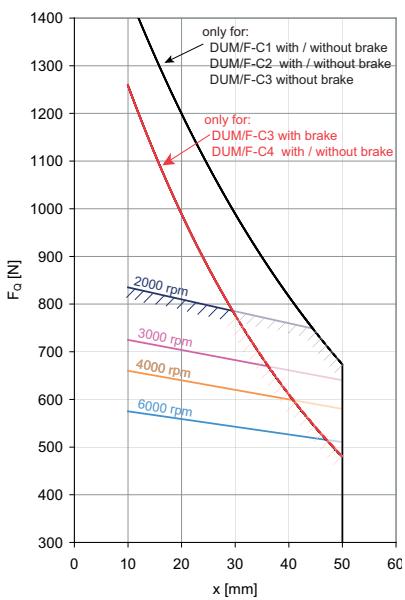


DUM/F 6-D

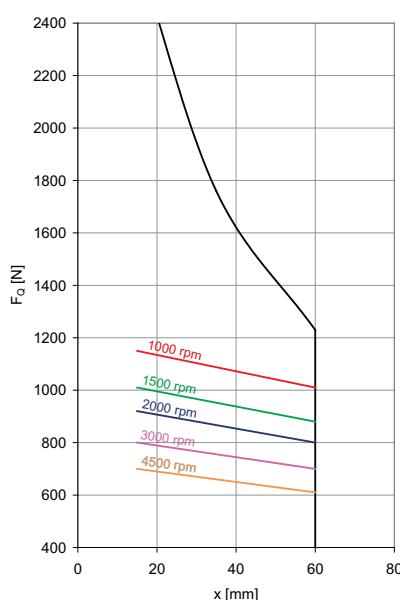

DUM/F 6-E

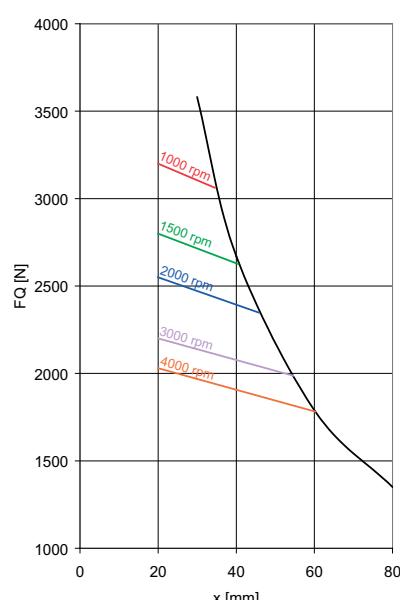

Connection system DUM/F 6-A...D

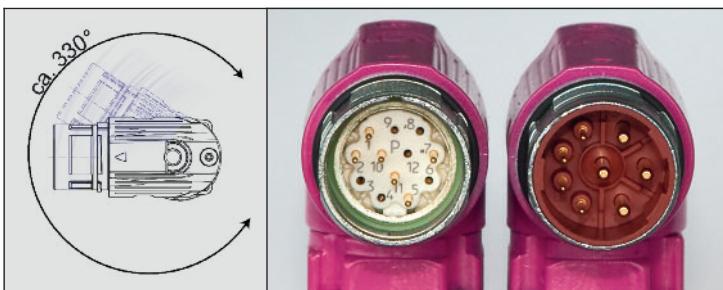


| | Encoder connection | Connection to system | Fan connection |
|--|--|--|--|
| Socket type | 12-pin rotatable angle socket | 8-pin rotatable angle socket | Connector plug (2-pole + ground wire) |
| Recommended connector | ASTA 021 FR01 12 0035 000 | B STA 108 FR05 08 0036 000 | included in delivery |
| Pinning configuration (view of motor connecting pins) | | | |
| | | | |
| Pin assignment | 1 - S4 SIN - 2 - S1 COS + 5 - R1 REF + 7 - R2 REF - 10 - S2 SIN + 11 - S3 COS - | 1 - U1 2 - PE 3 - W1 4 - V1 A - brake + (if any) B - brake - (if any) C - temperature detector + D - temperature detector - | 1 - L1 2 - N 3 - PE |

Accessories

| | Encoder connection | Connection to system |
|--|---|---|
| Cable sets (shielded, trailing: to customer spec.) | | |
| Cable connector | 12-pin connector ASTA 021 FR01 12 0035 000 | 8-pin connector B STA 108 FR05 08 0036 000 |
| | | |

Connection system DUM/F 6-E

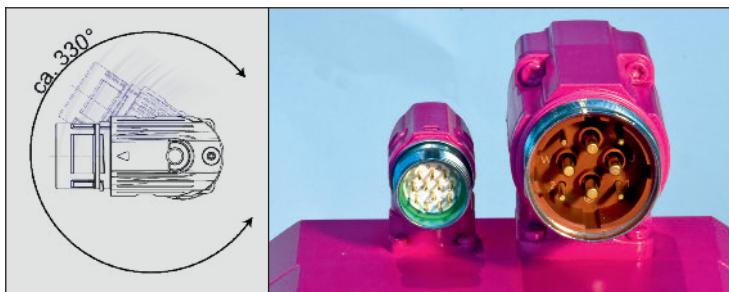

| | Encoder connection | Connection to system | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---------------------------------|--|-------|--------------|--------|-------|--------------|--------|-------|--------------|---------|--------|---------------|----------------------|--|---------------|----------------------|--|--|----------------------------|--|--|----------------------------|--|---|--------------|--------|-------|--------------|--------|-------|--------------|--------|-------|--------------|---------|--------|---------------|----------------------|--|---------------|----------------------|--|--|----------------------------|--|--|----------------------------|--|--|
| Socket type | 12-pin rotatable angle socket | 8-pin rotatable angle socket | Connector plug (3-pole + ground wire) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Recommended connector | A STA 021 FR0112 0035 000 | C ST A264 FR48 45 0001 000 | included in delivery | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pinning configuration (view of motor connecting pins) | | | 1 = U 2 = V 3 = W PE = PE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Pin assignment | <table border="1"> <tr><td>1 - S4 SIN -</td><td>U - U1</td><td>1 - U</td></tr> <tr><td>2 - S1 COS +</td><td>V - V1</td><td>2 - V</td></tr> <tr><td>5 - R1 REF +</td><td>W - W1</td><td>3 - W</td></tr> <tr><td>7 - R2 REF -</td><td>PE - PE</td><td>4 - PE</td></tr> <tr><td>10 - S2 SIN +</td><td>+ - brake + (if any)</td><td></td></tr> <tr><td>11 - S3 COS -</td><td>- - brake - (if any)</td><td></td></tr> <tr><td></td><td>1 - temperature detector +</td><td></td></tr> <tr><td></td><td>2 - temperature detector -</td><td></td></tr> </table> | 1 - S4 SIN - | U - U1 | 1 - U | 2 - S1 COS + | V - V1 | 2 - V | 5 - R1 REF + | W - W1 | 3 - W | 7 - R2 REF - | PE - PE | 4 - PE | 10 - S2 SIN + | + - brake + (if any) | | 11 - S3 COS - | - - brake - (if any) | | | 1 - temperature detector + | | | 2 - temperature detector - | | <table border="1"> <tr><td>1 - S4 SIN -</td><td>U - U1</td><td>1 - U</td></tr> <tr><td>2 - S1 COS +</td><td>V - V1</td><td>2 - V</td></tr> <tr><td>5 - R1 REF +</td><td>W - W1</td><td>3 - W</td></tr> <tr><td>7 - R2 REF -</td><td>PE - PE</td><td>4 - PE</td></tr> <tr><td>10 - S2 SIN +</td><td>+ - brake + (if any)</td><td></td></tr> <tr><td>11 - S3 COS -</td><td>- - brake - (if any)</td><td></td></tr> <tr><td></td><td>1 - temperature detector +</td><td></td></tr> <tr><td></td><td>2 - temperature detector -</td><td></td></tr> </table> | 1 - S4 SIN - | U - U1 | 1 - U | 2 - S1 COS + | V - V1 | 2 - V | 5 - R1 REF + | W - W1 | 3 - W | 7 - R2 REF - | PE - PE | 4 - PE | 10 - S2 SIN + | + - brake + (if any) | | 11 - S3 COS - | - - brake - (if any) | | | 1 - temperature detector + | | | 2 - temperature detector - | | |
| 1 - S4 SIN - | U - U1 | 1 - U | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 - S1 COS + | V - V1 | 2 - V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 - R1 REF + | W - W1 | 3 - W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 - R2 REF - | PE - PE | 4 - PE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 - S2 SIN + | + - brake + (if any) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 - S3 COS - | - - brake - (if any) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 - temperature detector + | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 - temperature detector - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 - S4 SIN - | U - U1 | 1 - U | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 - S1 COS + | V - V1 | 2 - V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 - R1 REF + | W - W1 | 3 - W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 - R2 REF - | PE - PE | 4 - PE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 - S2 SIN + | + - brake + (if any) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 - S3 COS - | - - brake - (if any) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 - temperature detector + | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 - temperature detector - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Accessories

| | Encoder connection | Connection to system |
|--|--|---|
| Cable sets (shielded, trailing: to customer spec.) | | |
| Cable connector | 12-pin connector ASTA 021 FR0112 0035 000 | 8-pin connector C ST A264 FR48 45 0001 000 |
| | | |

Type code

| Example: | DU | M | 6- | A | 3 | - | 2 | 0 | R9 | 6 | - | 000 | A |
|--|-----------|-----------|-----------|-----------|-----------|----------|-----------|-----------|-----------|-----------|----------|-----------|-----------|
| | DU | B3 | 6- | Z2 | Z3 | - | X1 | X2 | X3 | X4 | - | X5 | X7 |
| B3: Construction type:: M – flange, self-cooling F – flange, enforced-cooling | | | | | | | | | | | | | |
| Z2: Mounting window: A - 55 mm C - 95 mm D - 127 mm D - 194 mm | | | | | | | | | | | | | |
| Z3: Overall length: 1, 2, 3, 4 | | | | | | | | | | | | | |
| X1: Voltage variant: 2 - for supply voltages U_N from 400 V | | | | | | | | | | | | | |
| X2: Holding brake: 0 – no brake 4 – permanent-field holding brake | | | | | | | | | | | | | |
| X3: Measuring system: A8 - ECI/EQI 1300 (Heidenhain) AA - AD 34 (Hengstler) I8 - ERN 1387 (Heidenhain) IN - ERN 1185 (Heidenhain) IR - SRS 50/52 K (Sick-Stegmann) IW - SKS/SKM 36 (Sick-Stegmann) R9 - Resolver Size 15 (2, 6 or 8-pole) | | | | | | | | | | | | | |
| X4: Rated speed: 0 - 1,000 min ⁻¹ 1 - 1,500 min ⁻¹ 2 - 2,000 min ⁻¹ 3 - 3,000 min ⁻¹ 4 - 4,000 min ⁻¹ 6 - 6,000 min ⁻¹ | | | | | | | | | | | | | |
| X5: Modifications: 000 - Standard | | | | | | | | | | | | | |
| X7: Measuring system type, pin assignment (together with X3): A - with X3 = R9: 2-pole resolver; standard pin assignment | | | | | | | | | | | | | |



WITTUR Electric
Drives GmbH



Technical data DUM 6-A...



DUM 6-A1

for supply voltages U_N from 400 V

| Motor type | | DUM 6-A1- 2xx6 | DUM 6-A2- 2xx6 | DUM 6-A3- 2xx6 | DUM 6-A4- 2xx6 |
|-------------------------|----------------|-------------------|-------------------|-------------------|-------------------|
| Stall torque | M_{d0} [Nm] | 0.47 | 0.66 | 0.87 | 1.14 |
| Current at stall torque | I_{d0} [A] | 0.94 | 1.24 | 1.43 | 1.55 |
| Stall torque | M_{d10} [Nm] | 0.48 | 0.68 | 0.89 | 1.17 |
| Current at stall torque | I_{d10} [A] | 1.02 | 1.28 | 1.48 | 1.70 |
| Number of poles | 2p | | | 6 | |

Nominal rating

| | | | | | |
|----------------------------------|----------------------------------|------|------|------|------|
| Rated torque | M_{dN} [Nm] | 0.43 | 0.62 | 0.80 | 1.05 |
| Rated current | I_{dN} [A] | 0.93 | 1.16 | 1.30 | 1.45 |
| Rated speed | n_N [min ⁻¹] | 6000 | 6000 | 6000 | 6000 |
| Rated power | P_{dN} [kW] | 0.27 | 0.39 | 0.50 | 0.66 |
| Voltage constant ¹⁾ | k_e [V/1000min ⁻¹] | 31.2 | 34.1 | 35.8 | 41.5 |
| Winding resistance ²⁾ | R_{u-v} [Ω] | 37.4 | 24.0 | 17.8 | 12.6 |
| Winding inductance | L_{u-v} [mH] | 27.4 | 20.5 | 16.8 | 14.0 |

Max. values

| | | | | | |
|---------------------------|--------------------------------|-----|-----|-------|------|
| Max. torque | M_{max} [Nm] | 2.1 | 2.9 | 3.8 | 5.0 |
| Max. current (peak value) | I_{max} [A] | 6.7 | 8.0 | 9.2 | 10.2 |
| Max. speed | n_{max} [min ⁻¹] | | | 9,000 | |

Mechanical data ³⁾

| | | | | | |
|----------------|----------------------------|------|------|------|------|
| Inertia | J_L [kgcm ²] | 0.13 | 0.18 | 0.23 | 0.34 |
| Weight | m [kg] | 1.1 | 1.3 | 1.5 | 1.9 |
| Overall length | l_{38} [mm] | 121 | 133 | 145 | 170 |

1) at operating temperature

2) at 20°C

3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


R9 Resolver Size 15 (2- or 6-poe)

IN ERN 1185 (Heidenhain)


IW SKS/SKM 36 (Sick-Stegmann)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|------------------------|-----|--------------------|-----|------------------------|-----|
| | with resolver (R9) | | with encoder (IN / IW) | | with resolver (R9) | | with encoder (IN / IW) | |
| | l_{38} | r | l_{38} | r | l_{38} | r | l_{38} | r |
| DUM 6-A1 | 121 | 105 | 156 | 136 | 145 | 129 | 180 | 160 |
| DUM 6-A2 | 133 | 117 | 168 | 148 | 157 | 141 | 192 | 172 |
| DUM 6-A3 | 145 | 129 | 180 | 160 | 169 | 153 | 204 | 184 |
| DUM 6-A4 | 170 | 153 | 205 | 185 | 194 | 178 | 229 | 209 |

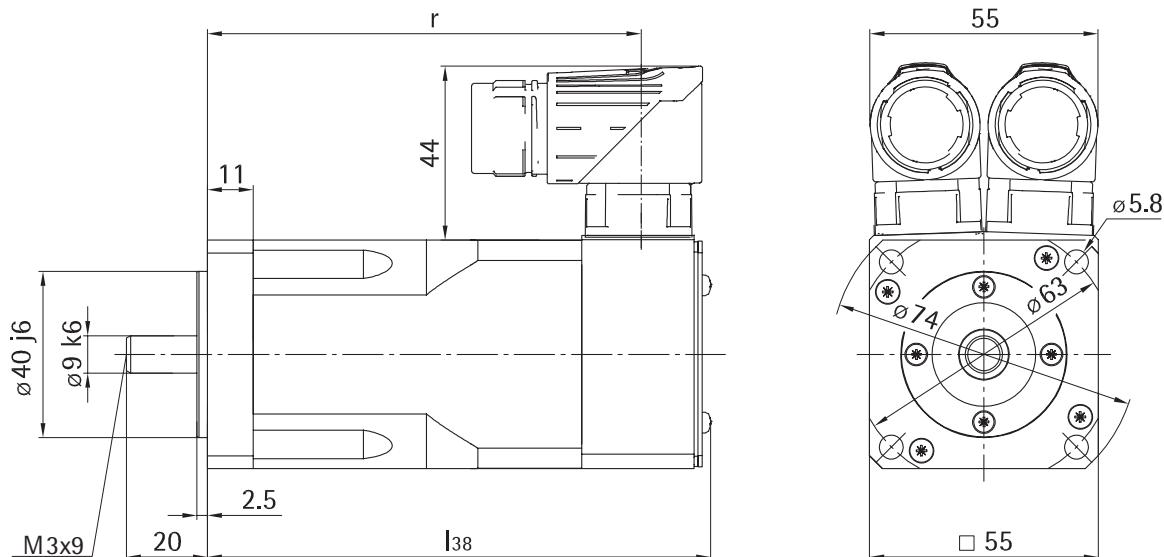

Speed-torque characteristics

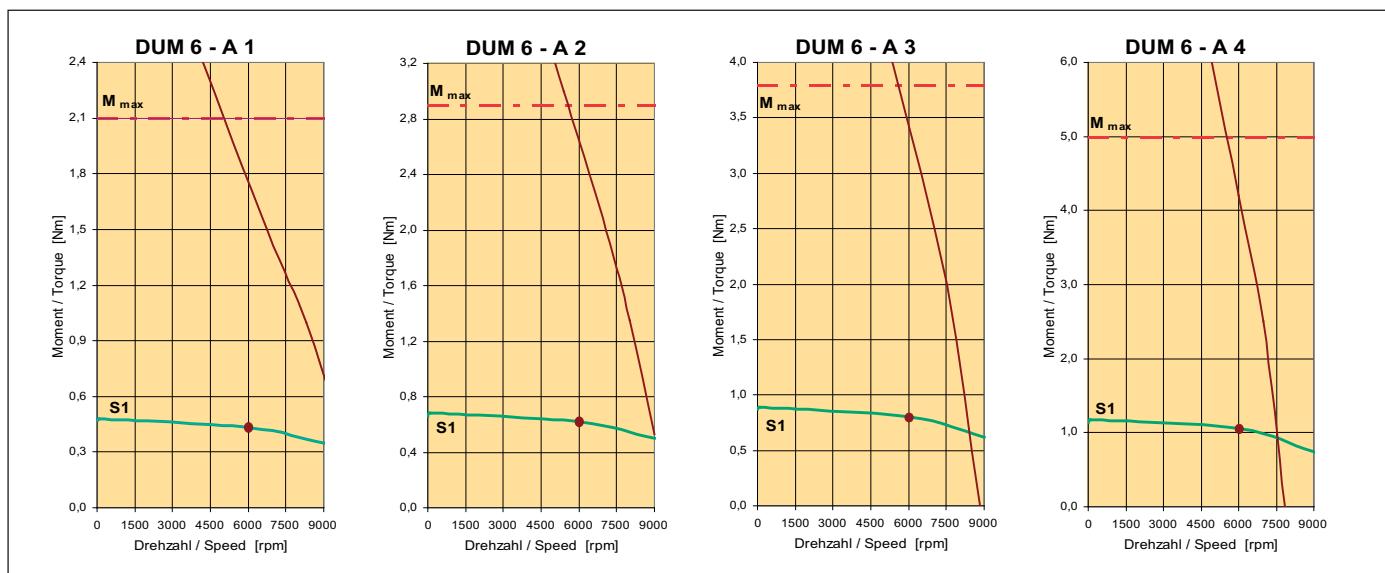

Holding brake

| | | | |
|----------------------|----------|----------------------|------|
| Holding torque | M_{Br} | [Nm] | 2.0 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 0.46 |
| Weight | m | [kg] | 0.18 |
| Rotor inertia | J_{Br} | [kgcm ²] | 0.07 |

Technical data DUM 6-C...



DUM 6-C1

for supply voltages U_N from 400 V

| Motor type | DUM 6-C1- 2xx2 2xx3 2xx4 | | | DUM 6-C2- 2xx2 2xx3 2xx4 | | | DUM 6-C3- 2xx2 2xx3 2xx4 | | | DUM 6-C4- 2xx2 2xx3 2xx4 | | |
|-------------------------|-----------------------------|------|-----|-----------------------------|------|-----|-----------------------------|------|-----|-----------------------------|------|-----|
| | M _{d0} | [Nm] | 3.9 | M _{d0} | [Nm] | 5.7 | M _{d0} | [Nm] | 7.1 | M _{d0} | [Nm] | 8.5 |
| Stall torque | I _{d0} | [A] | 2.5 | 3.1 | 3.9 | 3.8 | 5.0 | 6.1 | 5.7 | 7.0 | 8.8 | 5.5 |
| Current at stall torque | I _{d10} | [A] | 4.0 | 5.8 | | | | | 7.2 | | | 8.6 |
| Stall torque | I _{d10} | [A] | 2.5 | 3.1 | 3.9 | 3.8 | 5.1 | 6.2 | 4.5 | 5.5 | 6.9 | 4.3 |
| Current at stall torque | >10min ⁻¹ | [A] | | | | | | | 4.3 | 6.7 | 8.4 | |
| Number of poles | 2p | | | | | | | | 8 | | | |

Nominal rating

| | | | | | | | | | | | | | | |
|----------------------------------|------------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Rated torque | M _{dN} | [Nm] | 3.8 | 3.5 | 3.1 | 5.5 | 4.8 | 4.2 | 6.9 | 6.4 | 5.7 | 8.3 | 7.6 | 6.8 |
| Rated current | I _{dN} | [A] | 2.5 | 2.8 | 3.1 | 3.7 | 4.2 | 4.5 | 4.3 | 4.9 | 5.5 | 4.2 | 6.0 | 6.6 |
| Rated speed | n _N | [min ⁻¹] | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 |
| Rated power | P _{dN} | [kW] | 0.8 | 1.1 | 1.3 | 1.2 | 1.5 | 1.8 | 1.4 | 2.0 | 2.4 | 1.7 | 2.4 | 2.8 |
| Voltage constant ¹⁾ | k _e | [V/1000min ⁻¹] | 98.3 | 78.9 | 62.9 | 92.5 | 69.4 | 57.0 | 97.9 | 79.5 | 63.4 | 122 | 79.1 | 63.3 |
| Winding resistance ²⁾ | R _{u-v} | [Ω] | 11.6 | 7.4 | 4.7 | 6.1 | 3.6 | 2.4 | 4.4 | 2.9 | 1.8 | 5.3 | 2.2 | 1.4 |
| Winding inductance | L _{u-v} | [mH] | 29.5 | 19.0 | 12.1 | 16.5 | 9.3 | 6.3 | 13.5 | 8.9 | 5.7 | 20.0 | 8.4 | 5.4 |

Max. values

| | | | | | | | | | | | | | | |
|---------------------------|------------------|----------------------|-----|------|------|------|------|------|------|------|------|------|------|------|
| Max. torque | M _{max} | [Nm] | 12 | | 17.5 | | 22 | | 26 | | | | | |
| Max. current (peak value) | I _{max} | [A] | 8.4 | 10.5 | 13.2 | 12.6 | 16.8 | 20.4 | 16.2 | 20.0 | 25.1 | 15.3 | 23.8 | 29.6 |
| Max. speed | n _{max} | [min ⁻¹] | | | | | | | 6000 | | | | | |

Mechanical data ³⁾

| | | | | | | | | | | | | |
|----------------|-----------------|----------------------|-----|--|-----|--|-----|--|-----|--|--|--|
| Inertia | J _L | [kgcm ²] | 2.7 | | 3.7 | | 4.7 | | 6.0 | | | |
| Weight | m | [kg] | 4.8 | | 6.3 | | 7.4 | | 8.6 | | | |
| Overall length | l ₃₈ | [mm] | 178 | | 206 | | 234 | | 262 | | | |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- or 6-pole)

Dimensions

| Motortyp | without holding brake | | | | with holding brake | | | |
|----------|-----------------------|-----|-------------------------------|-----|--------------------|-----|-------------------------------|-----|
| | with resolver (R9) | | with encoder (A8, I8, IR, IW) | | with resolver (R9) | | with encoder (A8, I8, IR, IW) | |
| | l_{38} | r | l_{38} | r | l_{38} | r | l_{38} | r |
| DUM 6-C1 | 178 | 158 | 220 | 193 | 214 | 194 | 256 | 229 |
| DUM 6-C2 | 206 | 186 | 248 | 221 | 242 | 222 | 284 | 257 |
| DUM 6-C3 | 234 | 214 | 276 | 249 | 270 | 250 | 312 | 285 |
| DUM 6-C4 | 262 | 242 | 304 | 277 | 298 | 278 | 340 | 313 |

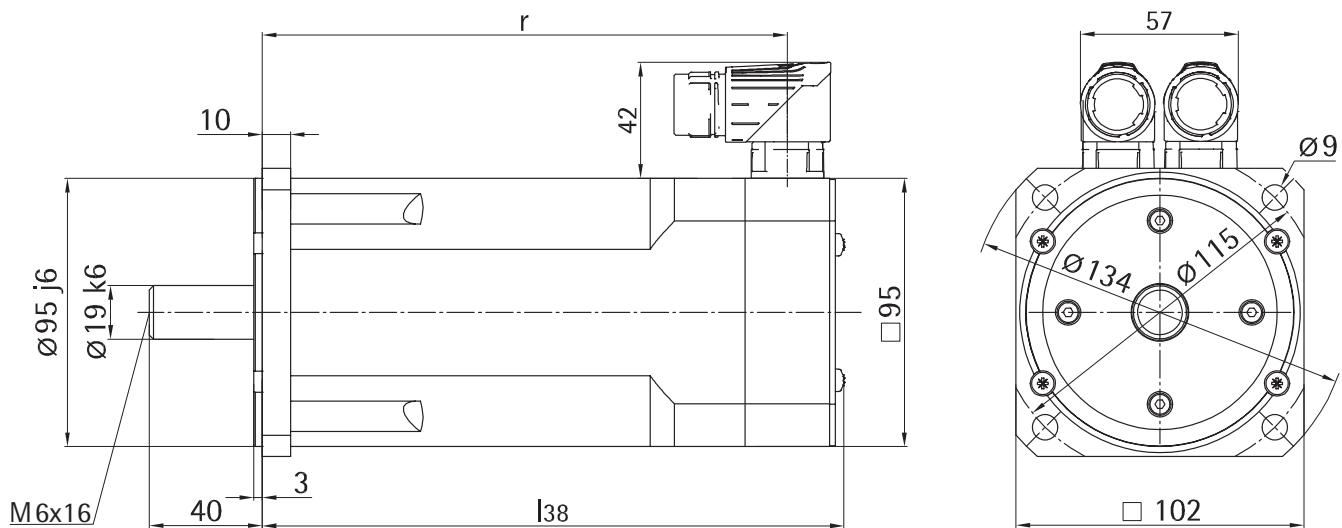

Speed-torque characteristics

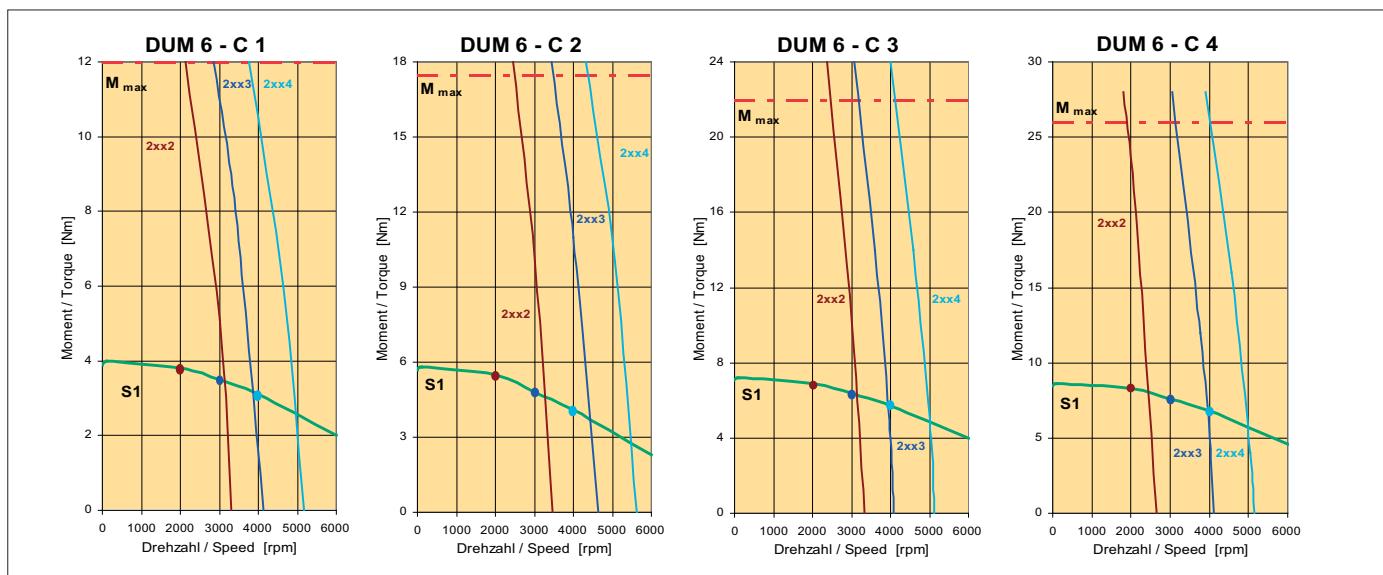

Holding brake

| | | | |
|----------------------|----------|---------|------|
| Holding torque | M_{Br} | [Nm] | 10 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 0.71 |
| Weight | m | [kg] | 0.57 |
| Rotor inertia | J_{Br} | [kgcm²] | 1.01 |

Technical data DUM 6-D...



DUM 6-D1

for supply voltages U_N from 400 V

| Motor type | | DUM 6-D1- | | | DUM 6-D2- | | | DUM 6-D3- | | | DUM 6-D4- | | |
|-------------------------|----------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| | | 2xx1 | 2xx2 | 2xx3 |
| Stall torque | M_{d0} [Nm] | | | | 8.2 | | | 11.6 | | | 15.3 | | 18.4 |
| Current at stall torque | I_{d0} [A] | 3.6 | 4.6 | 6.0 | 5.6 | 6.9 | 8.9 | 6.8 | 8.8 | 11.2 | 8.2 | 10.4 | 14.0 |
| Stall torque | M_{d10} [Nm] | | | | 8.3 | | | 11.8 | | | 15.6 | | 18.8 |
| Current at stall torque | I_{d10} [A] | 3.3 | 4.2 | 5.5 | 5.1 | 6.2 | 8.1 | 6.1 | 7.9 | 10.2 | 7.4 | 9.5 | 12.7 |
| Number of poles | 2p | | | | | | | 8 | | | | | |

Nominal rating

| | | | | | | | | | | | | | |
|----------------------------------|----------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Rated torque | M_{dN} [Nm] | 8.0 | 7.6 | 6.8 | 11.5 | 11.0 | 9.5 | 15.0 | 14.0 | 11.9 | 18.0 | 16.9 | 13.7 |
| Rated current | I_{dN} [A] | 3.3 | 4.0 | 4.6 | 5.1 | 6.0 | 6.7 | 6.1 | 7.3 | 8.0 | 7.4 | 8.8 | 9.6 |
| Rated speed | n_N [min ⁻¹] | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 |
| Rated power | P_{dN} [kW] | 1.3 | 1.6 | 2.1 | 1.8 | 2.3 | 3.0 | 2.4 | 2.9 | 3.8 | 2.8 | 3.5 | 4.3 |
| Voltage constant ¹⁾ | k_e [V/1000min ⁻¹] | 150 | 118 | 90.3 | 138 | 112 | 86.9 | 151 | 117 | 91.0 | 150 | 118 | 87.9 |
| Winding resistance ²⁾ | R_{u-v} [Ω] | 8.0 | 4.9 | 3.0 | 4.0 | 2.6 | 1.6 | 3.2 | 2.0 | 1.2 | 2.4 | 1.5 | 0.9 |
| Winding inductance | L_{u-v} [mH] | 35.0 | 21.5 | 12.7 | 19.0 | 12.6 | 7.5 | 15.3 | 9.2 | 5.6 | 9.4 | 5.8 | 3.2 |

Max. values

| | | | | | | |
|---------------------------|--------------------------------|------|------|------|------|--|
| Max. torque | M_{max} [Nm] | 25 | 36 | 47 | 57 | |
| Max. current (peak value) | I_{max} [A] | 12.1 | 15.5 | 20.1 | 19.0 | |
| Max. speed | n_{max} [min ⁻¹] | 4500 | | | | |

Mechanical data ³⁾

| | | | | | |
|----------------|----------------------------|------|------|------|------|
| Inertia | J_L [kgcm ²] | 7.9 | 11.2 | 14.4 | 19.5 |
| Weight | m [kg] | 10.0 | 11.9 | 14.0 | 18.0 |
| Overall length | l_{38} [mm] | 203 | 233 | 263 | 293 |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- or 6-pole)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|-------------------------------|-----|--------------------|-----|-------------------------------|-----|
| | with resolver (R9) | | with encoder (A8, I8, IR, IW) | | with resolver (R9) | | with encoder (A8, I8, IR, IW) | |
| | l_{38} | r | l_{38} | r | l_{38} | r | l_{38} | r |
| DUM 6-D1 | 203 | 182 | 245 | 217 | 237 | 216 | 279 | 251 |
| DUM 6-D2 | 233 | 212 | 275 | 247 | 267 | 246 | 309 | 281 |
| DUM 6-D3 | 263 | 242 | 305 | 277 | 297 | 276 | 339 | 311 |
| DUM 6-D4 | 293 | 272 | 335 | 307 | 327 | 306 | 369 | 341 |

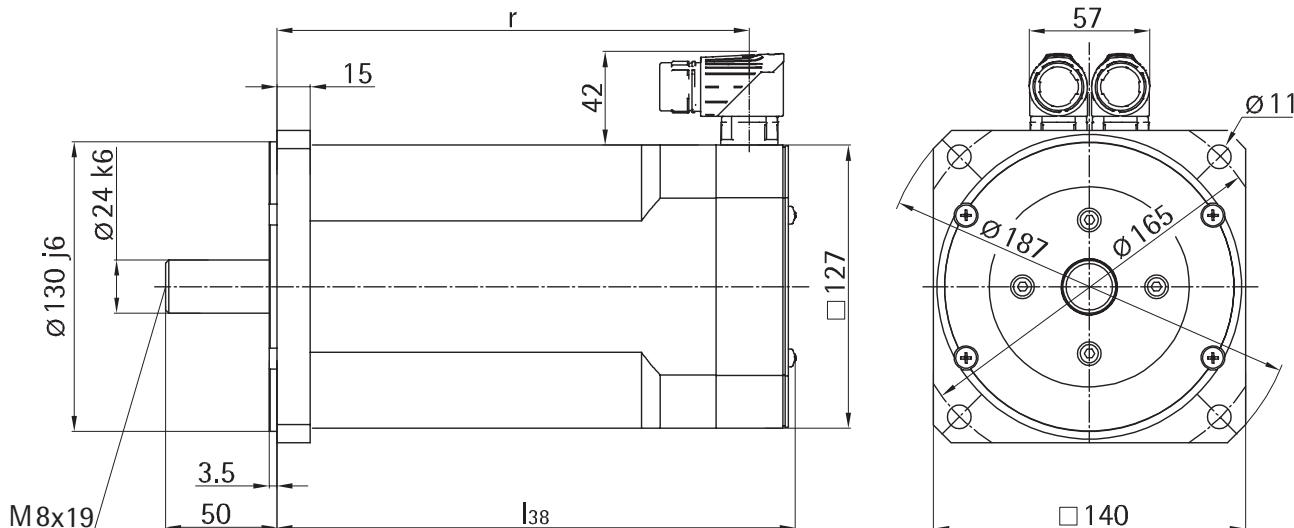


Speed-torque characteristics

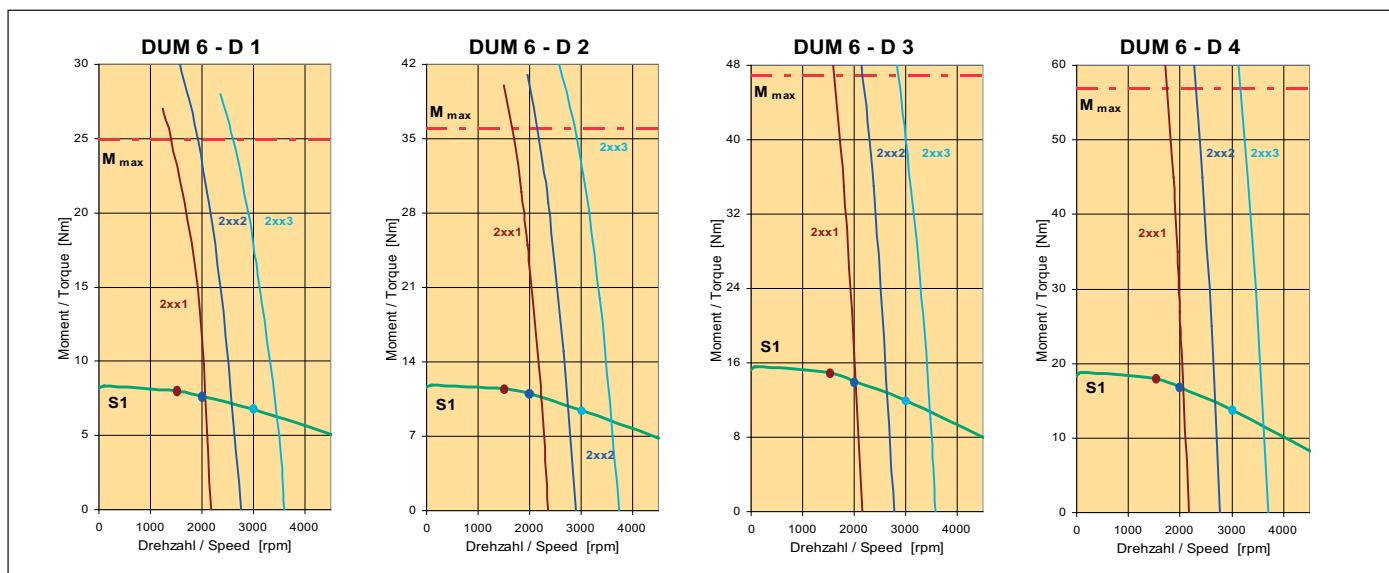

Holding brake

| | | | |
|----------------------|----------|---------|------|
| Holding torque | M_{Br} | [Nm] | 22 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 0.83 |
| Weight | m | [kg] | 1.15 |
| Rotor inertia | J_{Br} | [kgcm²] | 2.76 |

Technical data DUM 6-E...

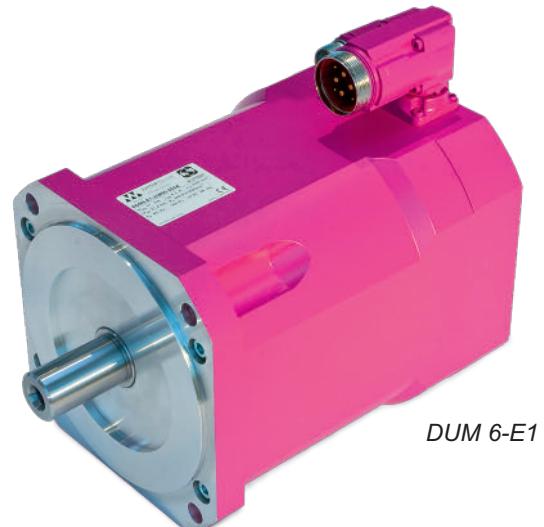

for supply voltages U_N from 400 V

| Motor type | DUM 6-E1- | | | DUM 6-E2- | | | DUM 6-E3- | | |
|-------------------------|-----------|------|------|-----------|------|------|-----------|------|------|
| | 2xx0 | 2xx2 | 2xx3 | 2xx0 | 2xx2 | 2xx3 | 2xx0 | 2xx2 | 2xx3 |
| Stall torque | M_{d0} | [Nm] | | 23,5 | | | 35,0 | | |
| Current at stall torque | I_{d0} | [A] | | 7,6 | 12,7 | 16,9 | 10,9 | 19,3 | 24,8 |
| Stall torque | M_{d10} | [Nm] | | 23,7 | | | 35,5 | | |
| Current at stall torque | I_{d10} | [A] | | 7,0 | 11,7 | 15,5 | 10,0 | 17,7 | 22,8 |
| Number of poles | 2p | | | | | | 8 | | |

Nominal rating

| | | | | | | | | | | | |
|----------------------------------|-----------|----------------------------|-------|-------|------|-------|-------|------|-------|-------|------|
| Rated torque | M_{dN} | [Nm] | 23 | 19 | 14 | 34 | 28 | 19 | 47 | 40 | 27 |
| Rated current | I_{dN} | [A] | 6,9 | 9,7 | 9,4 | 9,8 | 14,2 | 12,4 | 14,5 | 20,8 | 19,6 |
| Rated speed | n_N | [min ⁻¹] | 1000 | 2000 | 3000 | 1000 | 2000 | 3000 | 1000 | 2000 | 3000 |
| Rated power | P_{dN} | [kW] | 2,4 | 4,0 | 4,4 | 3,6 | 5,8 | 6,0 | 4,9 | 8,3 | 8,4 |
| Voltage constant ¹⁾ | k_e | [V/1000min ⁻¹] | 206,0 | 120,5 | 90,4 | 212,1 | 119,1 | 93,0 | 198,9 | 116,7 | 82,5 |
| Winding resistance ²⁾ | R_{u-v} | [Ω] | 2,31 | 0,79 | 0,5 | 1,42 | 0,44 | 0,27 | 0,87 | 0,3 | 0,15 |
| Winding inductance | L_{u-v} | [mH] | 38,9 | 13,3 | 7,5 | 26,1 | 8,2 | 5,0 | 17,3 | 5,9 | 3,0 |

Max. values

| | | | | | | | | | | |
|---------------------------|-----------|----------------------|------|------|------|------|------|------|--|--|
| Max. torque | M_{max} | [Nm] | 65 | | | 106 | | | | |
| Max. current (peak value) | I_{max} | [A] | 23,3 | 39,3 | 52,2 | 36,3 | 64,1 | 81,7 | | |
| Max. speed | n_{max} | [min ⁻¹] | 4000 | | | | | | | |

Mechanical data ³⁾

| | | | | | | | | |
|----------------|----------|----------------------|-----|--|--|-----|--|--|
| Inertia | J_L | [kgcm ²] | 57 | | | 79 | | |
| Weight | m | [kg] | 29 | | | 34 | | |
| Overall length | l_{38} | [mm] | 266 | | | 294 | | |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- AA AD 34 (Hengstler)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- oder 8-polig)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|------------------------------------|-----|--------------------|-----|------------------------------------|-----|
| | with resolver (R9) | | with encoderr (A8, AA, I8, IR, IW) | | with resolver (R9) | | with encoderr (A8, AA, I8, IR, IW) | |
| | I_{38} | r | I_{38} | r | I_{38} | r | I_{38} | r |
| DUM 6-E1 | 266 | 237 | 293 | 264 | 300 | 271 | 327 | 298 |
| DUM 6-E2 | 294 | 265 | 321 | 292 | 328 | 299 | 355 | 326 |
| DUM 6-E3 | 322 | 293 | 349 | 320 | 356 | 327 | 383 | 354 |

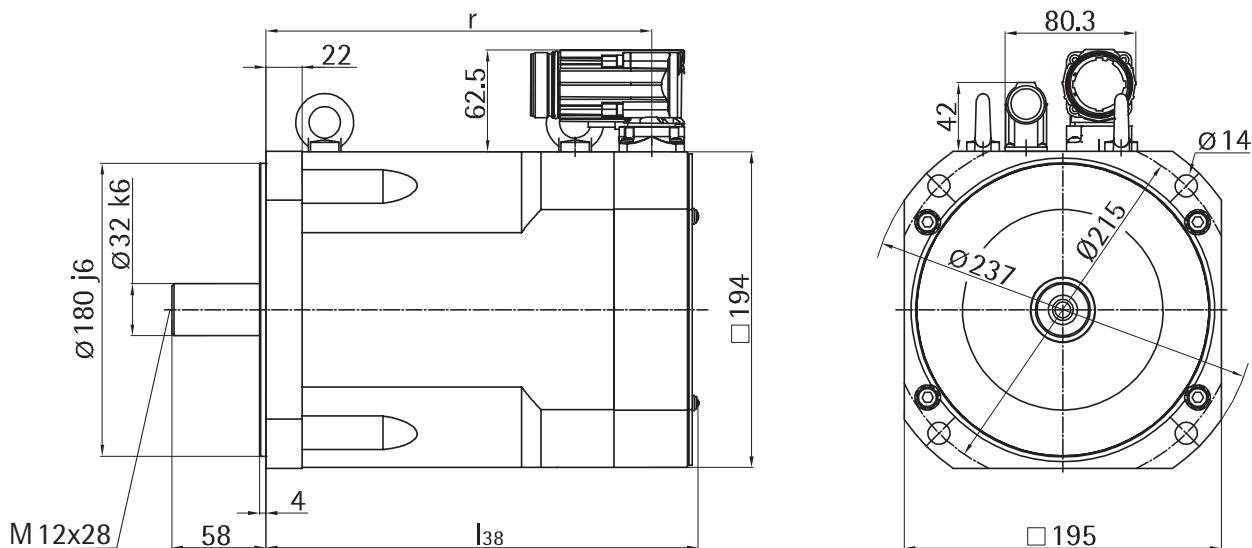

Speed-torque characteristics

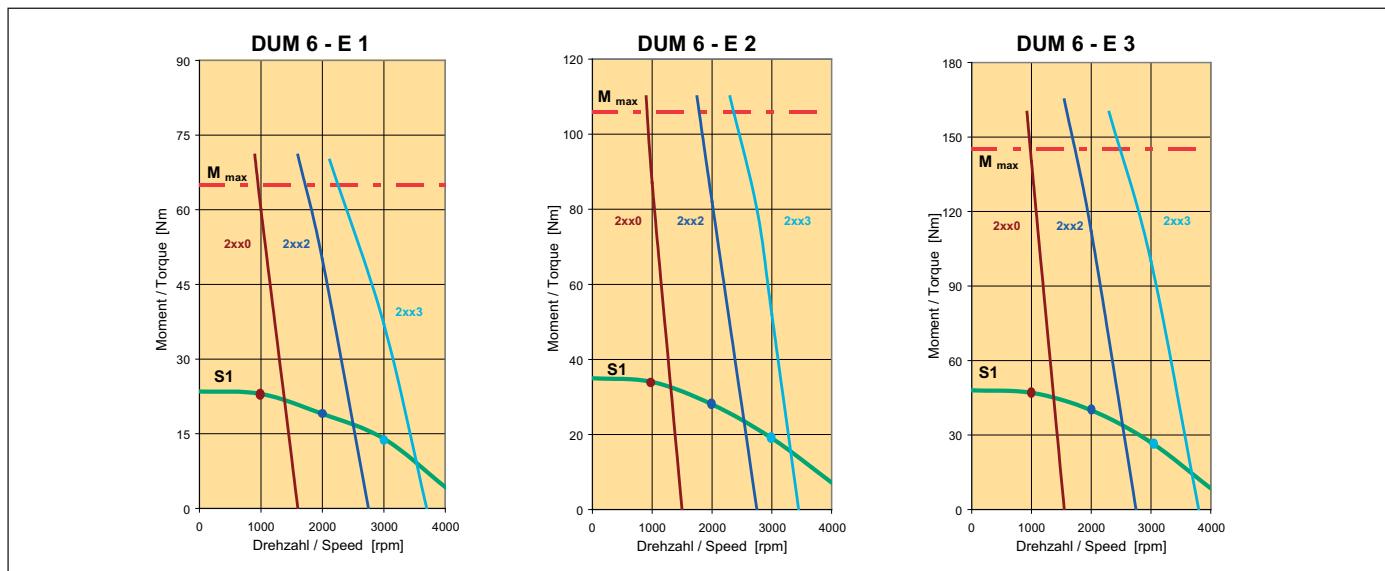

Holding brake

| | | | |
|----------------------|----------|----------------------|------|
| Holding torque | M_{Br} | [Nm] | 70 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 1.5 |
| Weight | m | [kg] | 3.4 |
| Rotor inertia | J_{Br} | [kgcm ²] | 20.1 |

Technical data DUF 6-C...



DUF 6-C3

for supply voltages U_N from 400V

| Motor type | DUF 6-C1- 2xx2 2xx3 2xx4 | | | DUF 6-C2- 2xx2 2xx3 2xx4 | | | DUF 6-C3- 2xx2 2xx3 2xx4 | | | DUF 6-C4- 2xx2 2xx3 2xx4 | | | | | | | | | | |
|-----------------|-----------------------------|------|-----|-----------------------------|-----|------|-----------------------------|-----|-----|-----------------------------|-----|-----|-----|-----|-----|-----|------|-----|------|------|
| | M _{d0} | [Nm] | 5.0 | 7.4 | 9.2 | 11.1 | I _{d0} | [A] | 3.2 | 4.0 | 5.0 | 4.9 | 6.5 | 7.9 | 7.4 | 9.1 | 11.4 | 7.1 | 11.0 | 13.7 |
| Stall torque | M _{d10} | [Nm] | 5.2 | 7.7 | 9.5 | 11.4 | I _{d10} | [A] | 3.3 | 4.1 | 5.2 | 5.0 | 6.7 | 8.2 | 5.9 | 7.3 | 9.1 | 5.6 | 8.7 | 10.9 |
| Number of poles | 2p | | | | 8 | | | | | | | | | | | | | | | |

Nominal rating

| | | | | | | | | | | | | | | |
|----------------------------------|------------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Rated torque | M _{dN} | [Nm] | 5.2 | 4.7 | 4.2 | 7.4 | 6.4 | 5.6 | 9.3 | 8.6 | 7.7 | 11.2 | 10.3 | 9.2 |
| Rated current | I _{dN} | [A] | 3.3 | 3.8 | 4.2 | 4.9 | 5.7 | 6.1 | 5.8 | 6.7 | 7.5 | 5.7 | 8.0 | 8.9 |
| Rated speed | n _N | [min ⁻¹] | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 | 2000 | 3000 | 4000 |
| Rated power | P _{dN} | [kW] | 1.1 | 1.5 | 1.8 | 1.6 | 2.0 | 2.4 | 1.9 | 2.7 | 3.2 | 2.3 | 3.2 | 3.8 |
| Voltage constant ¹⁾ | k _e | [V/1000min ⁻¹] | 98.3 | 78.9 | 62.9 | 92.5 | 69.4 | 57.0 | 97.9 | 79.5 | 63.4 | 122 | 79.1 | 63.3 |
| Winding resistance ²⁾ | R _{u-v} | [Ω] | 11.6 | 7.4 | 4.7 | 6.1 | 3.6 | 2.4 | 4.4 | 2.9 | 1.8 | 5.3 | 2.2 | 1.4 |
| Winding inductance | L _{u-v} | [mH] | 29.5 | 19.0 | 12.1 | 16.5 | 9.3 | 6.3 | 13.5 | 8.9 | 5.7 | 20.0 | 8.4 | 5.4 |

Max. values

| | | | | | | | | | | | | | | |
|---------------------------|------------------|----------------------|-----|------|------|------|------|------|------|------|------|------|------|------|
| Max. torque | M _{max} | [Nm] | 12 | 17.5 | 22 | 26 | | | | | | | | |
| Max. current (peak value) | I _{max} | [A] | 8.4 | 10.5 | 13.2 | 12.6 | 16.8 | 20.4 | 16.2 | 20.0 | 25.1 | 15.3 | 23.8 | 29.6 |
| Max. speed | n _{max} | [min ⁻¹] | | | 6000 | | | | | | | | | |

Mechanical data ³⁾

| | | | | | | |
|----------------|-----------------|----------------------|-----|-----|-----|------|
| Inertia | J _L | [kgcm ²] | 2.7 | 3.7 | 4.7 | 6.0 |
| Weight | m | [kg] | 6.3 | 7.8 | 9.0 | 10.4 |
| Overall length | l ₃₉ | [mm] | 259 | 287 | 315 | 343 |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- or 6-pole)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|--------------------------------|-----|--------------------|-----|--------------------------------|-----|
| | with resolver (R9) | | with encoderr (A8, I8, IR, IW) | | with resolver (R9) | | with encoderr (A8, I8, IR, IW) | |
| | l_{39} | r | l_{39} | r | l_{39} | r | l_{39} | r |
| DUF 6-C1 | 259 | 158 | 301 | 193 | 295 | 194 | 337 | 229 |
| DUF 6-C2 | 287 | 186 | 329 | 221 | 323 | 222 | 365 | 257 |
| DUF 6-C3 | 315 | 214 | 357 | 249 | 351 | 250 | 393 | 285 |
| DUF 6-C4 | 343 | 242 | 385 | 277 | 379 | 278 | 421 | 313 |

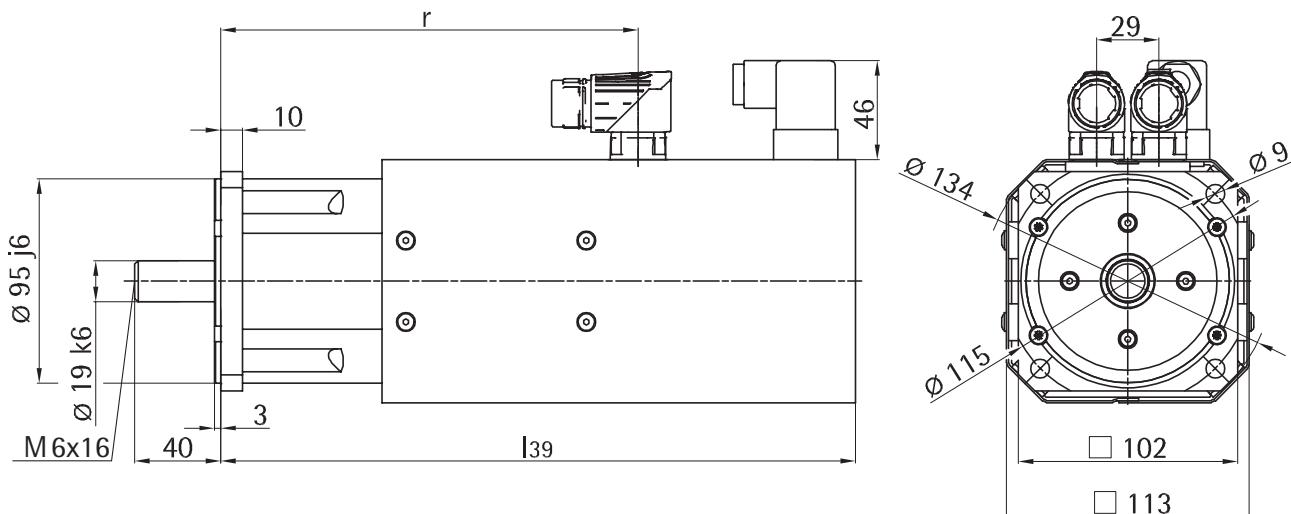


Speed-torque characteristics

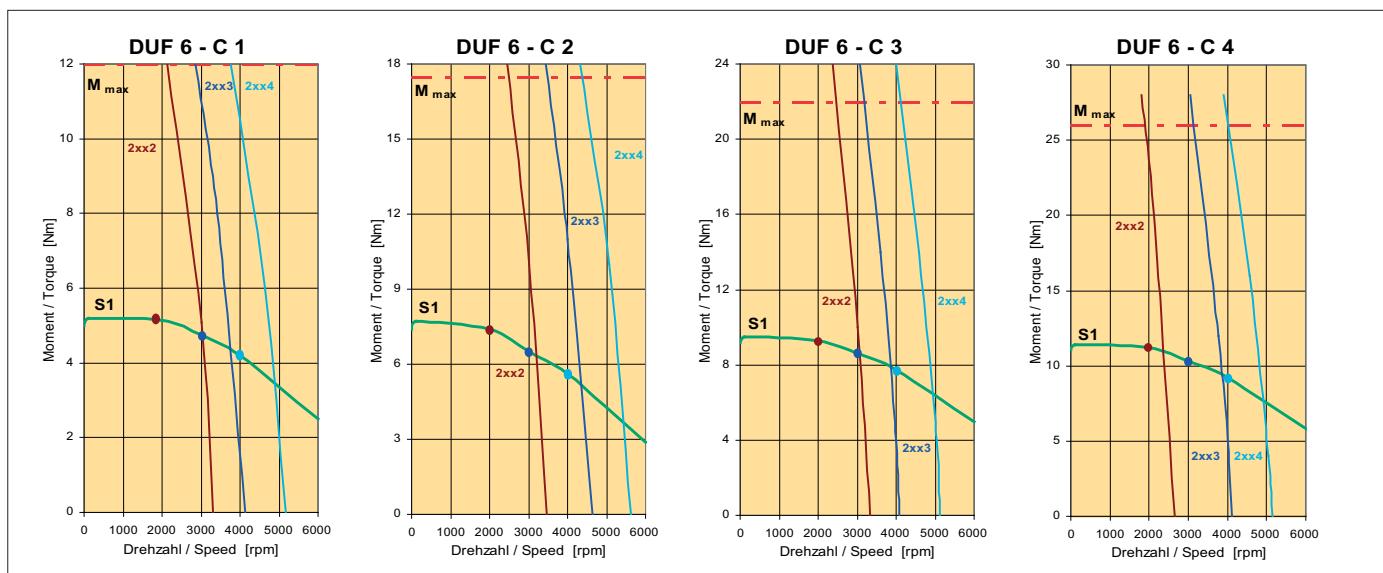

Holding brake

| | | | |
|----------------------|----------|---------|------|
| Holding torque | M_{Br} | [Nm] | 10 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 0.71 |
| Weight | m | [kg] | 0.57 |
| Rotor inertia | J_{Br} | [kgcm²] | 1.01 |

Technical data DUF 6-D...

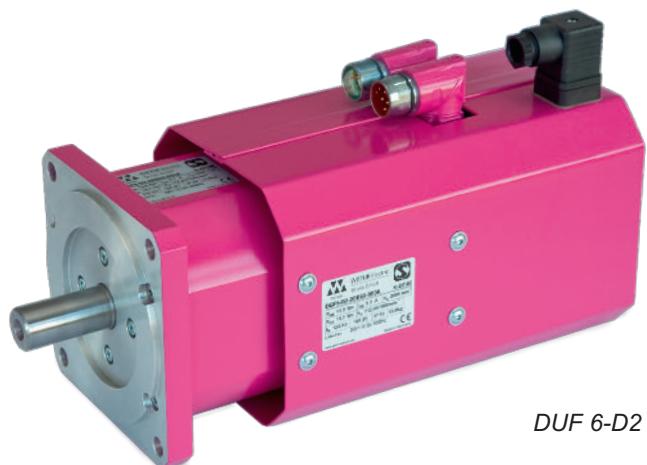

DUF 6-D2

for supply voltages U_N from 400 V

| Motor type | DUF 6-D1- | | | DUF 6-D2- | | | DUF 6-D3- | | | DUF 6-D4- | | |
|-------------------------|----------------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| | 2xx1 | 2xx2 | 2xx3 | 2xx1 | 2xx2 | 2xx3 | 2xx1 | 2xx2 | 2xx3 | 2xx1 | 2xx2 | 2xx3 |
| Stall torque | M_{d0} [Nm] | | | 10.6 | | | 15.1 | | | 19.9 | | |
| Current at stall torque | I_{d0} | [A] | | 4.7 | 6.0 | 7.9 | 7.3 | 9.0 | 11.6 | 8.8 | 11.4 | 14.6 |
| Stall torque | M_{d10} [Nm] | | | 11.0 | | | 15.6 | | | 20.6 | | |
| Current at stall torque | I_{d10} | [A] | | 4.4 | 5.6 | 7.2 | 6.7 | 8.2 | 10.6 | 8.1 | 10.5 | 13.4 |
| Number of poles | 2p | | | | | | 8 | | | | | |

Nominal rating

| | | | | | | | | | | | | | | |
|----------------------------------|-----------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| Rated torque | M_{dN} | [Nm] | 10.8 | 10.3 | 9.1 | 15.6 | 14.9 | 12.8 | 20.2 | 18.9 | 16.1 | 24.3 | 22.8 | 18.5 |
| Rated current | I_{dN} | [A] | 4.4 | 5.4 | 6.2 | 6.9 | 8.1 | 9.1 | 8.2 | 9.9 | 10.9 | 9.9 | 11.9 | 12.9 |
| Rated speed | n_N | [min ⁻¹] | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 | 1500 | 2000 | 3000 |
| Rated power | P_{dN} | [kW] | 1.7 | 2.2 | 2.9 | 2.4 | 3.1 | 4.0 | 3.2 | 4.0 | 5.1 | 3.8 | 4.8 | 5.8 |
| Voltage constant ¹⁾ | k_e | [V/1000min ⁻¹] | 150 | 118 | 90.3 | 138 | 112 | 86.9 | 151 | 117 | 91.0 | 150 | 118 | 87.9 |
| Winding resistance ²⁾ | R_{u-v} | [Ω] | 8.0 | 4.9 | 3.0 | 4.0 | 2.6 | 1.6 | 3.2 | 2.0 | 1.2 | 2.4 | 1.5 | 0.9 |
| Winding inductance | L_{u-v} | [mH] | 35.0 | 21.5 | 12.7 | 19.0 | 12.6 | 7.5 | 15.3 | 9.2 | 5.6 | 9.4 | 5.8 | 3.2 |

Max. values

| | | | | | | | | | | | | | | | |
|---------------------------|-----------|----------------------|------|--|--|------|--|--|------|--|--|------|--|--|--|
| Max. torque | M_{max} | [Nm] | 25 | | | 36 | | | 47 | | | 57 | | | |
| Max. current (peak value) | I_{max} | [A] | 12.1 | | | 19.0 | | | 22.7 | | | 27.2 | | | |
| Max. speed | n_{max} | [min ⁻¹] | 4500 | | | | | | | | | | | | |

Mechanical data ³⁾

| | | | | | | | | | | | | | | |
|----------------|----------|----------------------|------|--|--|------|--|--|------|--|--|------|--|--|
| Inertia | J_L | [kgcm ²] | 7.9 | | | 11.2 | | | 14.4 | | | 19.5 | | |
| Weight | m | [kg] | 11.9 | | | 13.8 | | | 16.2 | | | 20.4 | | |
| Overall length | l_{39} | [mm] | 285 | | | 315 | | | 345 | | | 375 | | |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- or 6-pole)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|--------------------------------|-----|--------------------|-----|--------------------------------|-----|
| | with resolver (R9) | | with encoderr (A8, I8, IR, IW) | | with resolver (R9) | | with encoderr (A8, I8, IR, IW) | |
| | l_{39} | r | l_{39} | r | l_{39} | r | l_{39} | r |
| DUF 6-D1 | 285 | 182 | 327 | 217 | 319 | 216 | 361 | 251 |
| DUF 6-D2 | 315 | 212 | 357 | 247 | 349 | 246 | 391 | 281 |
| DUF 6-D3 | 345 | 242 | 387 | 277 | 379 | 276 | 421 | 311 |
| DUF 6-D4 | 375 | 272 | 417 | 307 | 409 | 306 | 451 | 341 |

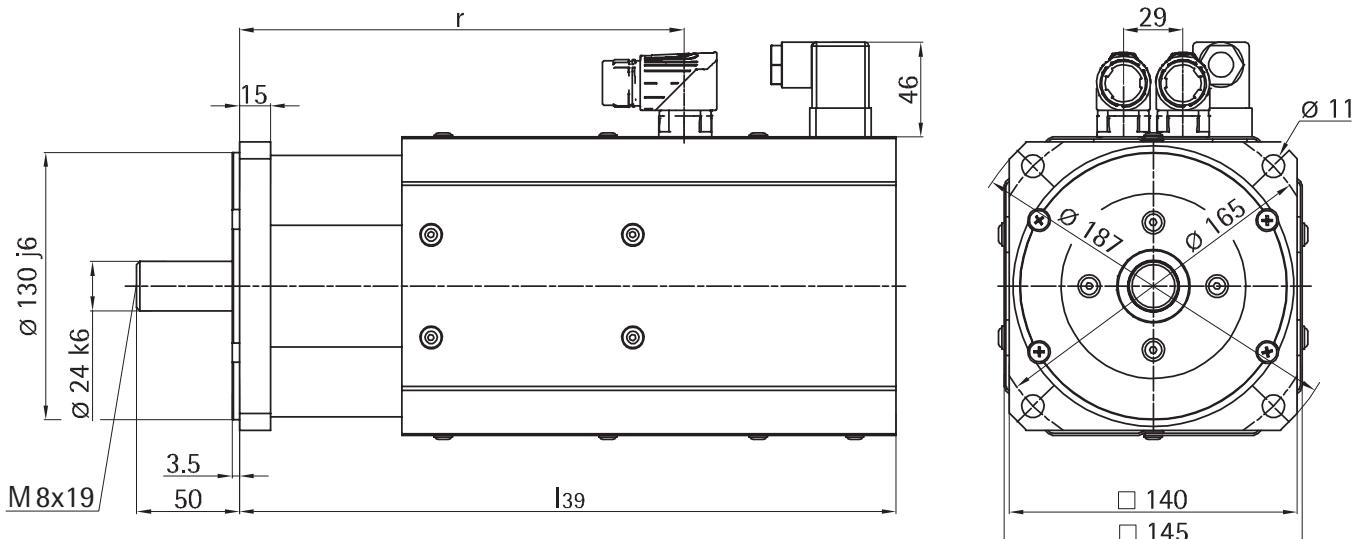


Speed-torque characteristics

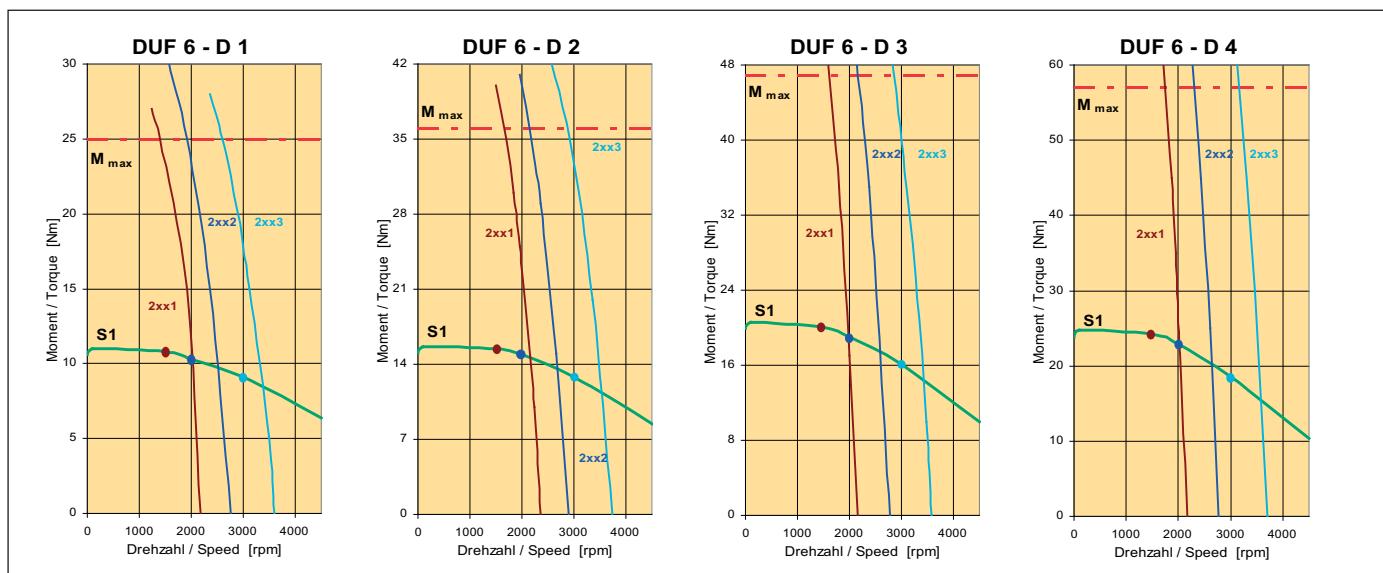

Holding brake

| | | | |
|----------------------|----------|---------|------|
| Holding torque | M_{Br} | [Nm] | 22 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 0.83 |
| Weight | m | [kg] | 1.15 |
| Rotor inertia | J_{Br} | [kgcm²] | 2.76 |

Technical data DUF 6-E...

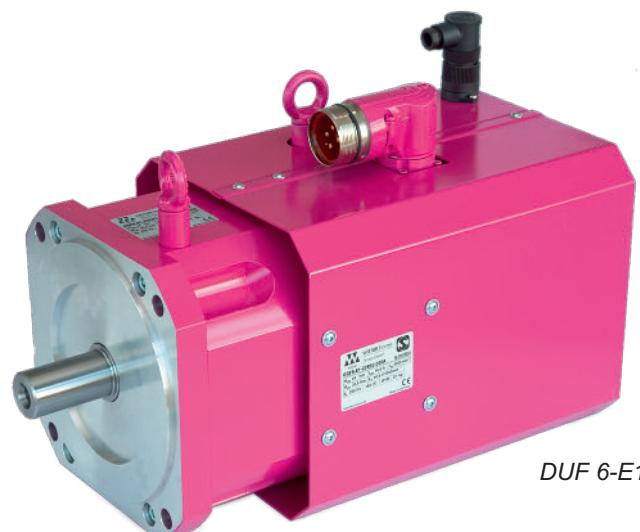

DUF 6-E1

for supply voltages U_N from 400 V

| Motor type | DUF 6-E1- | | | DUF 6-E2- | | | DUF 6-E3- | | |
|-------------------------|-----------|------|------|-----------|------|------|-----------|------|------|
| | 2xx0 | 2xx2 | 2xx3 | 2xx0 | 2xx2 | 2xx3 | 2xx0 | 2xx2 | 2xx3 |
| Stall torque | M_{d0} | [Nm] | | 30,6 | | | 45,5 | | |
| Current at stall torque | I_{d0} | [A] | | 9,9 | 17,1 | 22,8 | 14,4 | 25,5 | 32,5 |
| Stall torque | M_{d10} | [Nm] | | 30,8 | | | 45,8 | | |
| Current at stall torque | I_{d10} | [A] | | 9,1 | 15,1 | 20,2 | 13,0 | 23,0 | 29,6 |
| Number of poles | 2p | | | | | | 8 | | |

Nominal rating

| | | | | | | | | | | | |
|----------------------------------|-----------|----------------------------|-------|-------|------|-------|-------|------|-------|-------|------|
| Rated torque | M_{dN} | [Nm] | 30 | 28 | 24 | 45 | 40 | 34 | 62 | 57 | 48 |
| Rated current | I_{dN} | [A] | 9,3 | 14,4 | 16,6 | 13,3 | 21,0 | 22,3 | 19,9 | 30,8 | 36,2 |
| Rated speed | n_N | [min ⁻¹] | 1000 | 2000 | 3000 | 1000 | 2000 | 3000 | 1000 | 2000 | 3000 |
| Rated power | P_{dN} | [kW] | 3,1 | 5,8 | 7,6 | 4,7 | 8,4 | 10,6 | 6,5 | 11,9 | 15,2 |
| Voltage constant ¹⁾ | k_e | [V/1000min ⁻¹] | 206,0 | 120,5 | 90,4 | 212,1 | 119,1 | 93,0 | 198,9 | 116,7 | 82,5 |
| Winding resistance ²⁾ | R_{u-v} | [Ω] | 2,31 | 0,79 | 0,5 | 1,42 | 0,44 | 0,27 | 0,87 | 0,3 | 0,15 |
| Winding inductance | L_{u-v} | [mH] | 38,9 | 13,3 | 7,5 | 26,1 | 8,2 | 5,0 | 17,3 | 5,9 | 3,0 |

Max. values

| | | | | | | | | | | | |
|---------------------------|-----------|----------------------|------|------|------|------|------|------|------|------|-------|
| Max. torque | M_{max} | [Nm] | 65 | | 106 | 145 | | | | | |
| Max. current (peak value) | I_{max} | [A] | 23,3 | 39,3 | 52,2 | 36,3 | 64,1 | 81,7 | 53,2 | 90,4 | 127,0 |
| Max. speed | n_{max} | [min ⁻¹] | 4000 | | | | | | | | |

Mechanical data ³⁾

| | | | | | | |
|----------------|----------|----------------------|-----|----|-----|-----|
| Inertia | J_L | [kgcm ²] | 57 | | 79 | 102 |
| Weight | m | [kg] | 32 | 37 | 42 | |
| Overall length | l_{39} | [mm] | 380 | | 414 | 448 |

1) at operating temperature

2) at 20°C


3) with resolver size 15 (X3=R9), without holding brake

Measuring systems (X3):


- A8 ECI/EQI 1300 (Heidenhain)
- AA AD 34 (Hengstler)
- I8 ERN 1387 (Heidenhain)
- IR SRS/SRM 50 (Sick-Stegmann)
- IW SKS/SKM 36 (Sick-Stegmann)
- R9 Resolver Size 15 (2- oder 8-polig)

Dimensions

| Motor type | without holding brake | | | | with holding brake | | | |
|------------|-----------------------|-----|------------------------------------|-----|--------------------|-----|------------------------------------|-----|
| | with resolver (R9) | | with encoderr (A8, AA, I8, IR, IW) | | with resolver (R9) | | with encoderr (A8, AA, I8, IR, IW) | |
| | l_{39} | r | l_{39} | r | l_{39} | r | l_{39} | r |
| DUF 6-E1 | 380 | 237 | 407 | 264 | 414 | 271 | 441 | 298 |
| DUF 6-E2 | 408 | 265 | 435 | 292 | 442 | 299 | 469 | 326 |
| DUF 6-E3 | 436 | 293 | 463 | 320 | 470 | 327 | 497 | 354 |

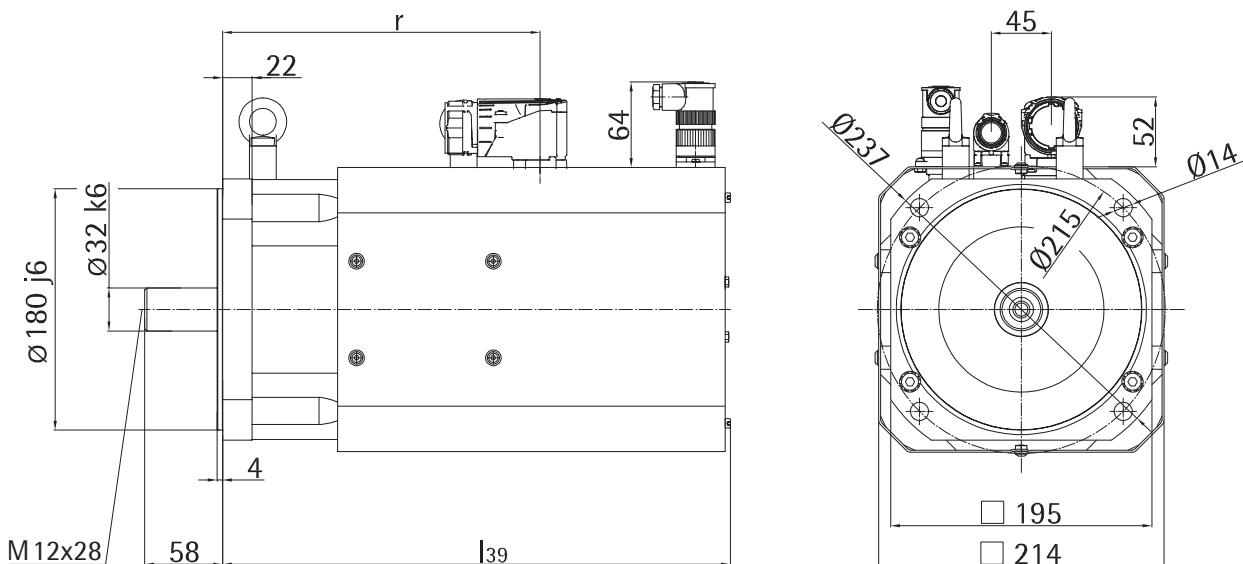

Speed-torque characteristics

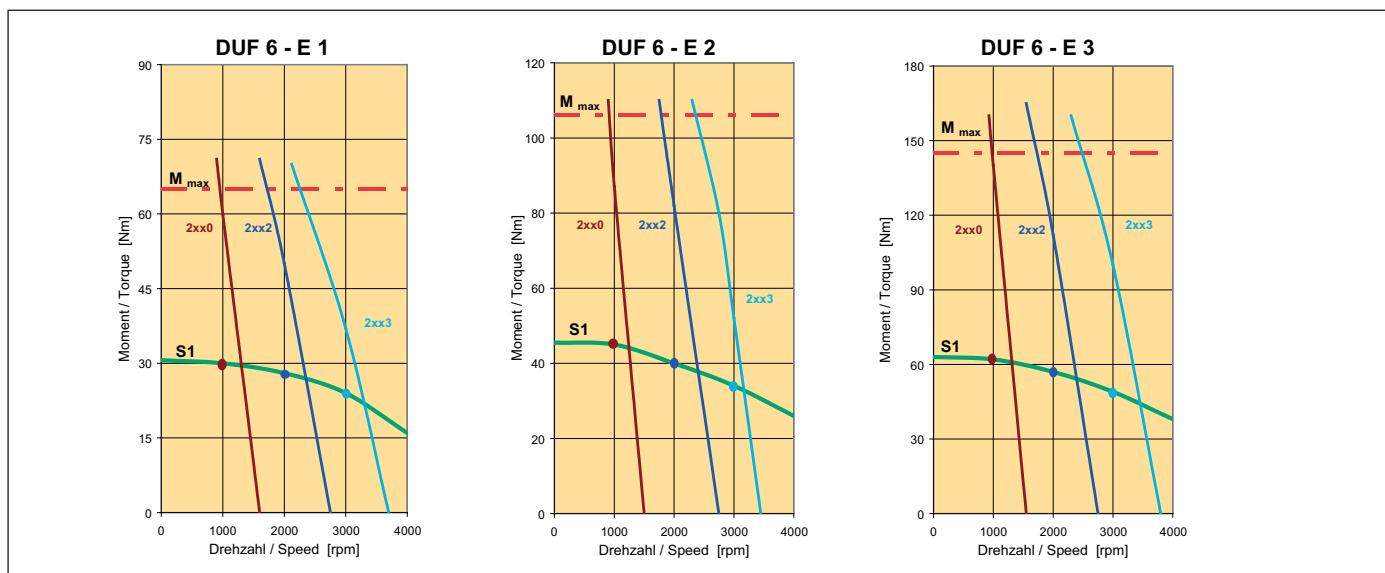

Holding brake

| | | | |
|--|----------|--------------|------|
| Holding torque | M_{Br} | [Nm] | 70 |
| Rated voltage | U_{Br} | [V] | 24 |
| Rated current (20°C) | I_{Br} | [A] | 1.5 |
| Weight | m | [kg] | 3.4 |
| Rotor inertia | J_{Br} | [kgcm 2] | 20.1 |



WITTUR Electric
Drives GmbH



Offenburger Str. 3
D-01189 Dresden
Germany
Tel. +49 (0) 3 51-40 44-0
Fax +49 (0) 3 51-40 44-1 11
info.wed@wittur.com
www.wittur-edrives.de